

2J6024M

CELLULAR/LTE Magnetic Mount

Key Features

Cable 1: CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 MHz

Magnetic Mount

Low Profile

Ground Plane Independent

Customizable Cable and Connector

Dimensions 80 x 76 x 13 mm



1. Antenna and electrical specifications

Cable 1

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-10.0	~-7.8	~-9.7
VSWR	~2.2:1	~2.6:1	~2.1:1
Efficiency (%)	~25.3	~20.2	~36.1
Peak Gain (dBi)	~-0.7	~-1.7	~-4.4
Average Gain (dB)	~-6.1	~-7.1	~-4.4
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	DACAR302 Standard (Other Cables Available)		

Antenna Measurement Conditions:

Mounted on 30 x 30 x 0.25 cm Metal Plate

200 cm of Cable DACAR302



Measured in Certified CTIA 3D Anechoic Chamber




2. Mechanical and environmental specifications


Specifications	2J6024M
Mounting Type	Magnetic Mount
Dimensions (mm)	80 x 76 x 13
Radome	ABS UV Stable
Radome color	Black
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS

3. Antenna parameters

Cable 1: CELLULAR/LTE

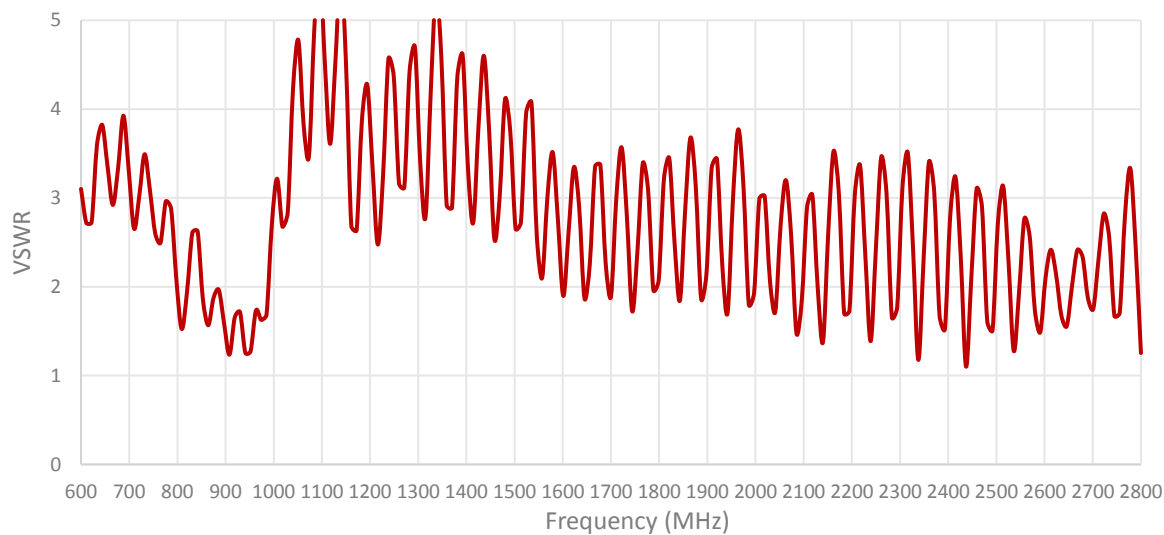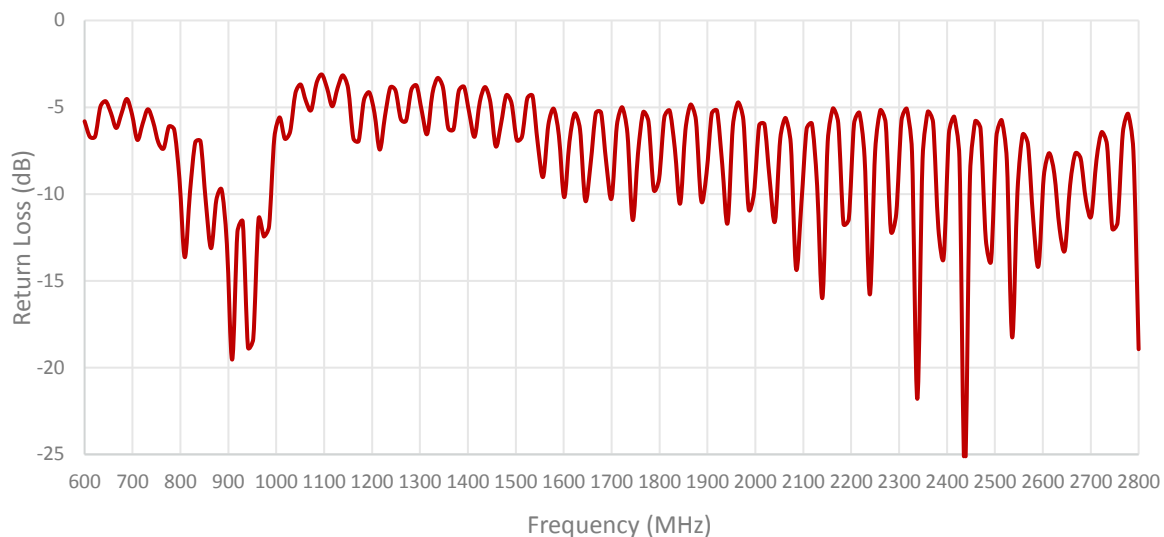


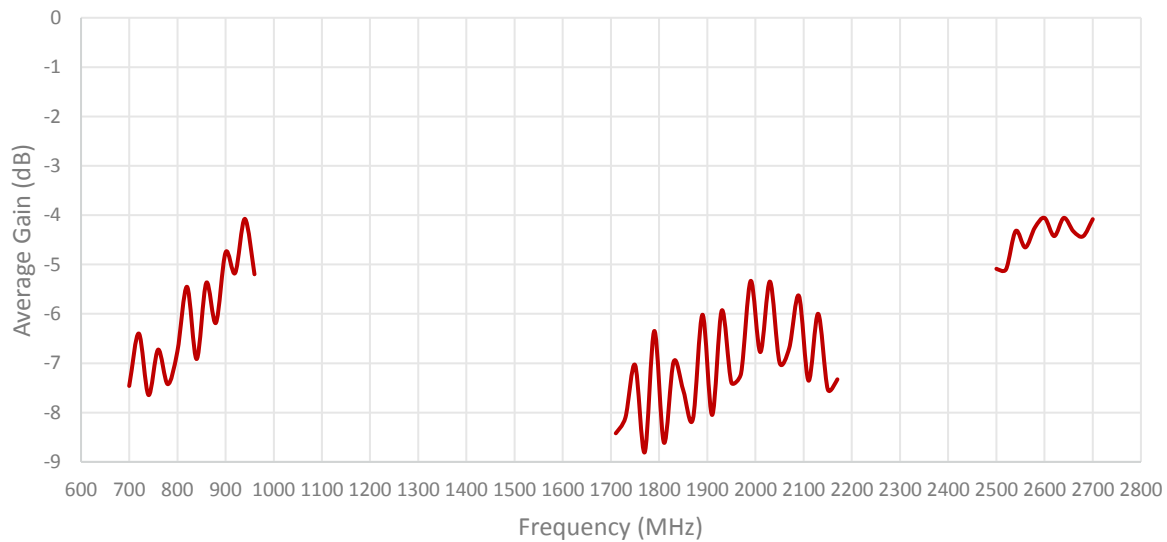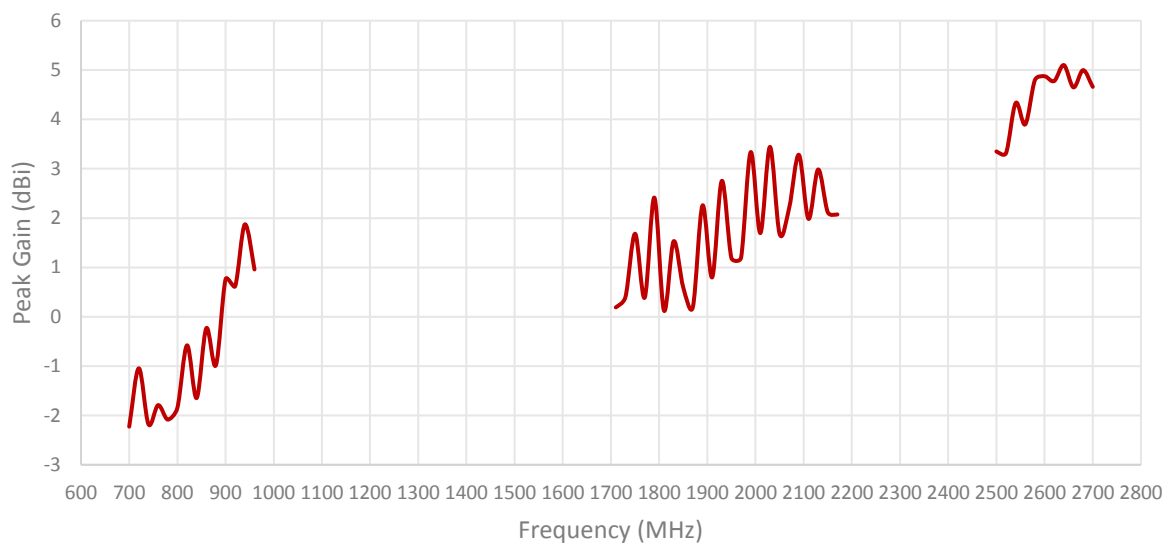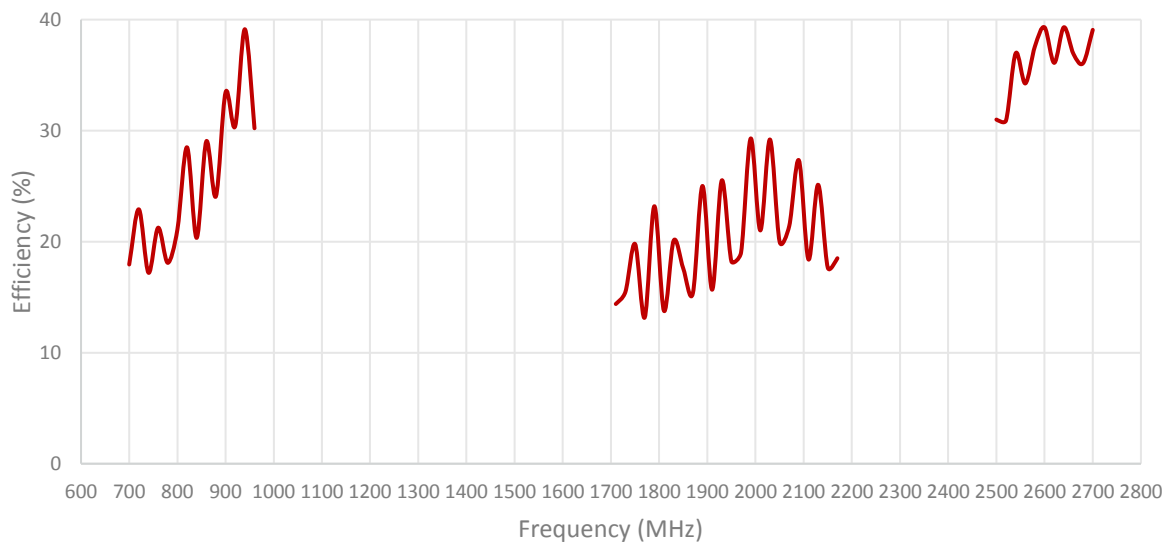

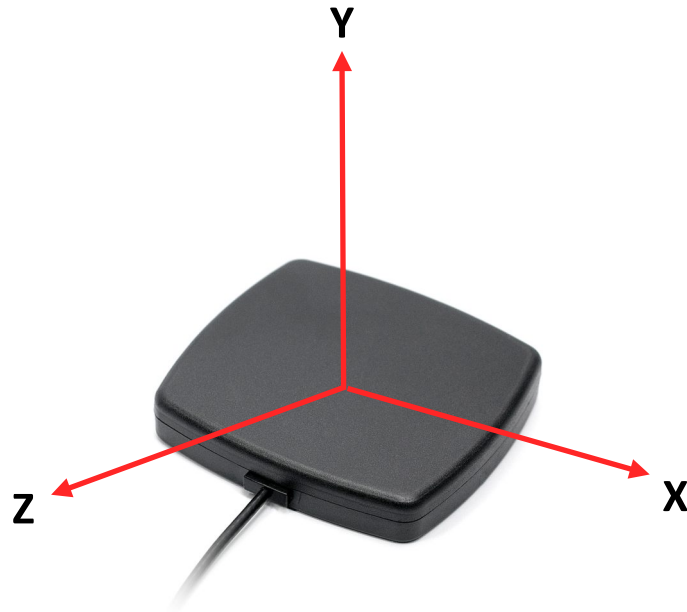


Radiation pattern reference


Cable 1: CELLULAR/LTE

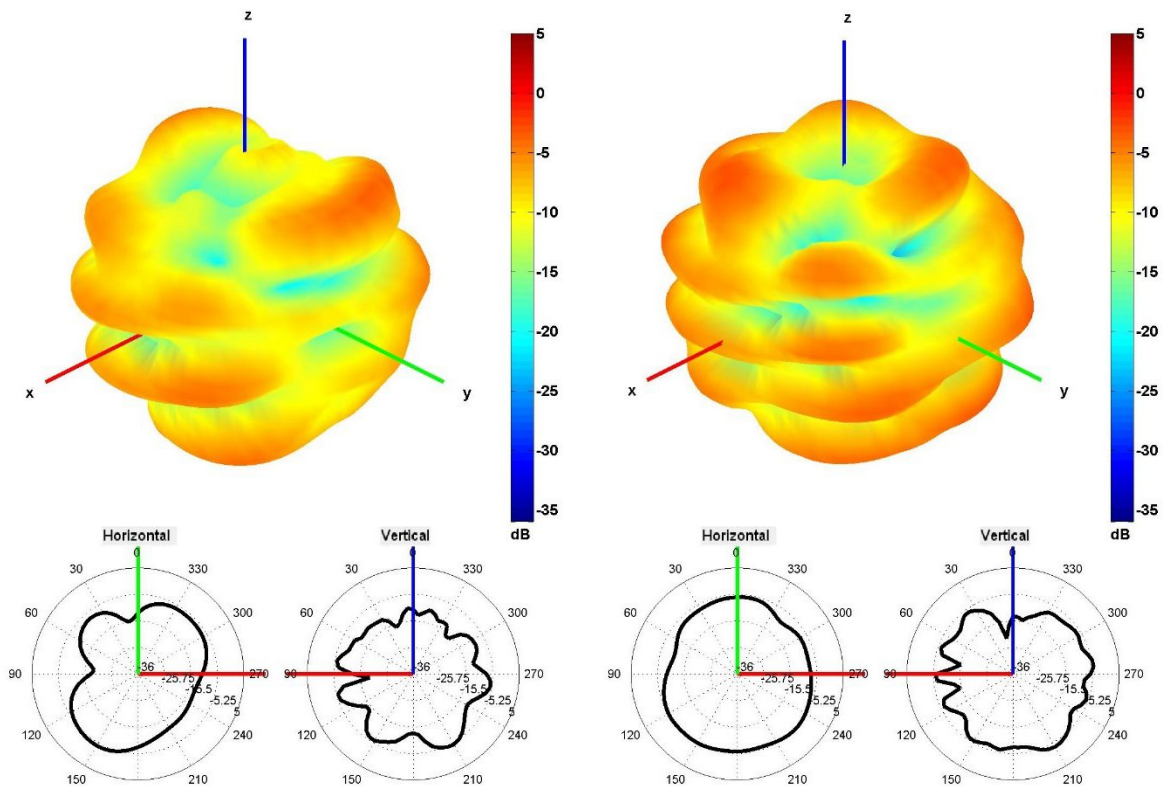


750 and 850 MHz Radiation pattern

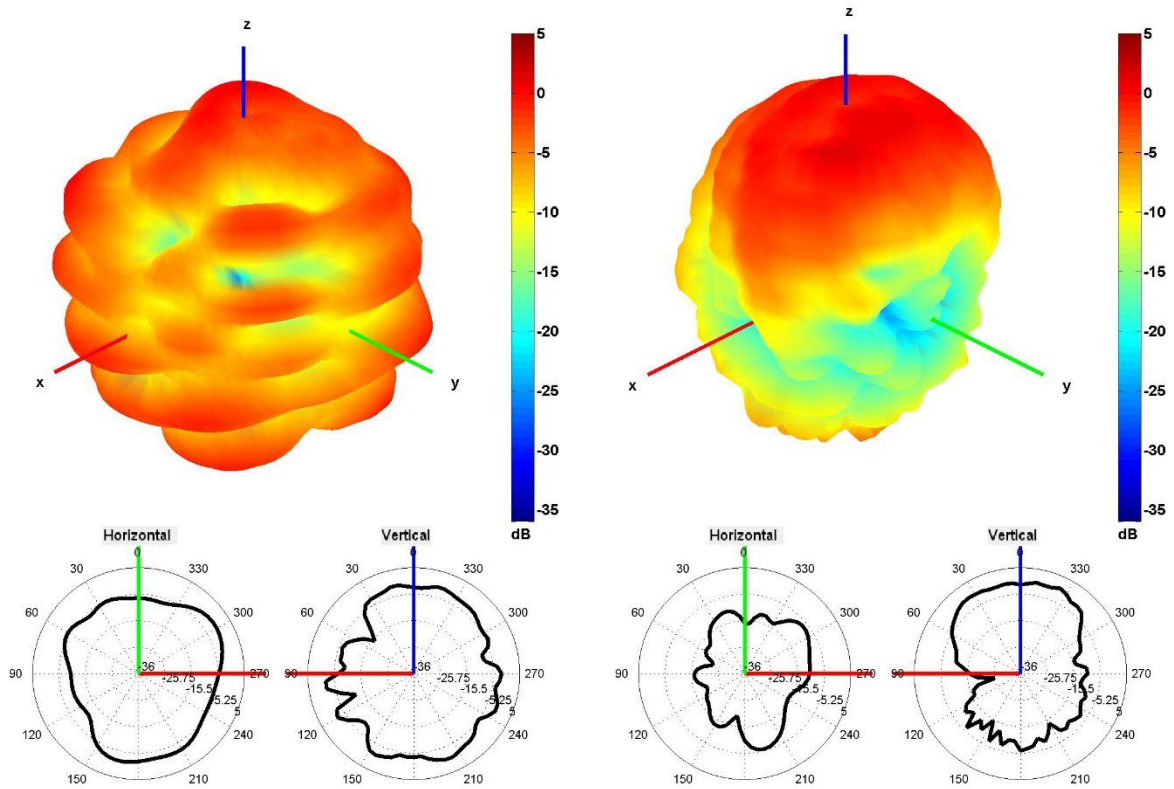

940 and 1750 MHz Radiation pattern


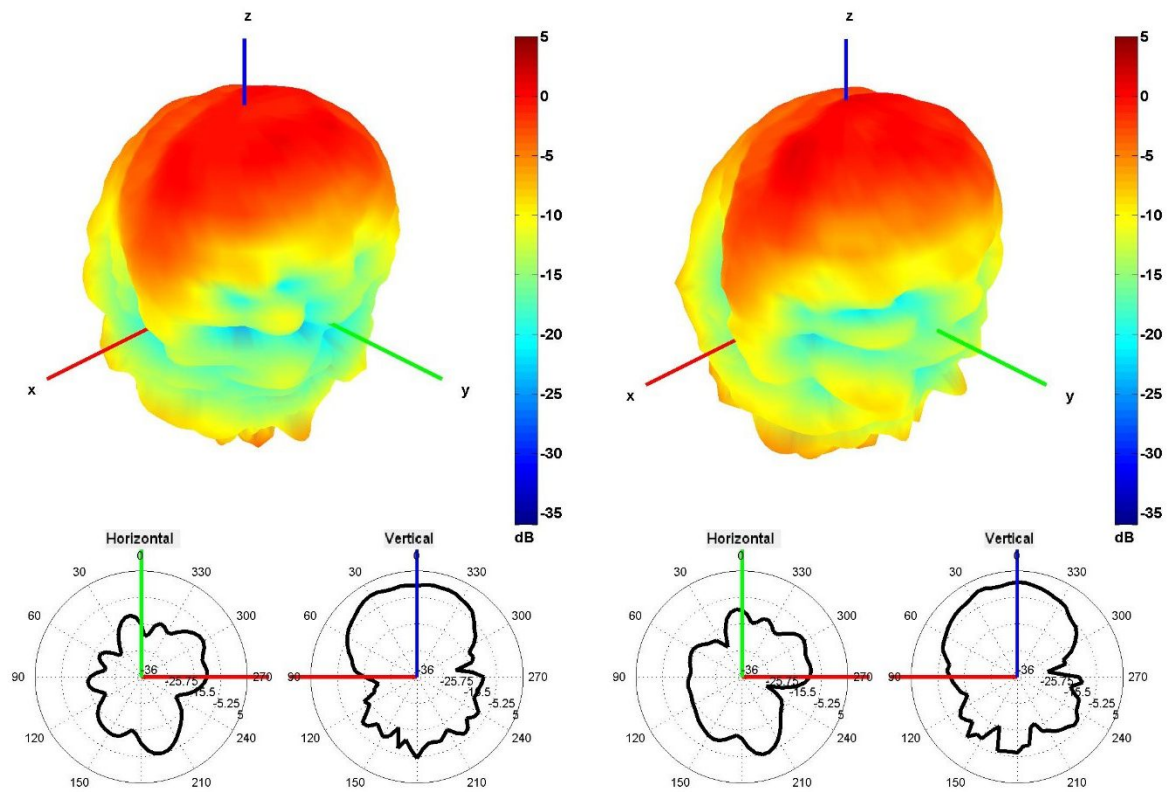


1850 and 1950 MHz Radiation pattern

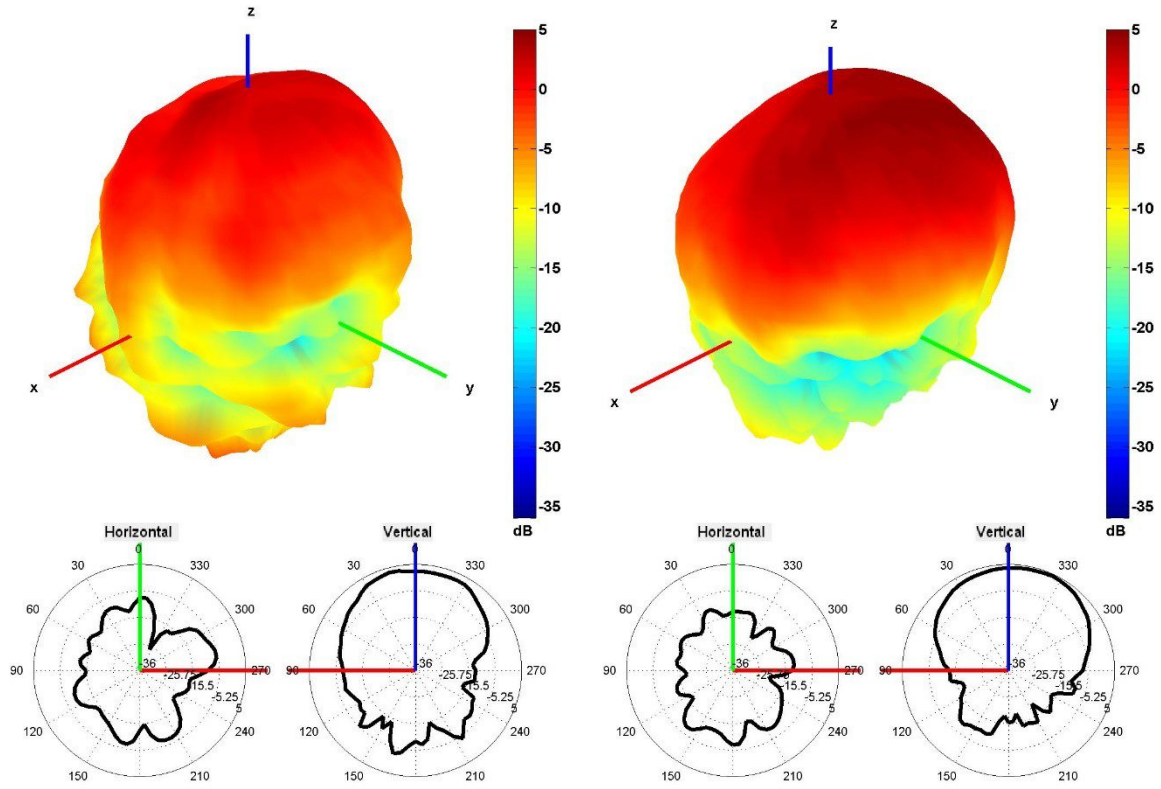

2100 and 2600 MHz Radiation pattern

4. Antenna drawings

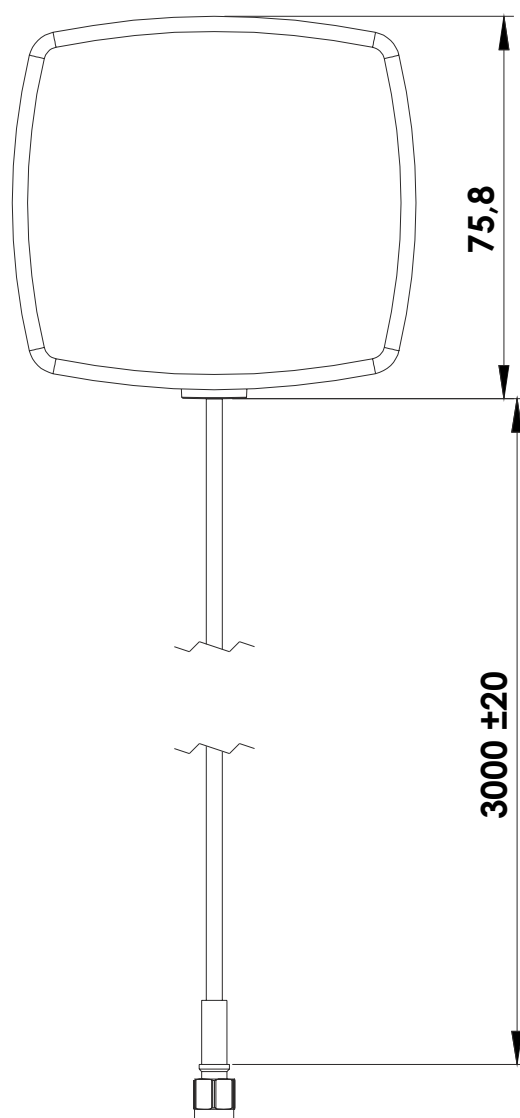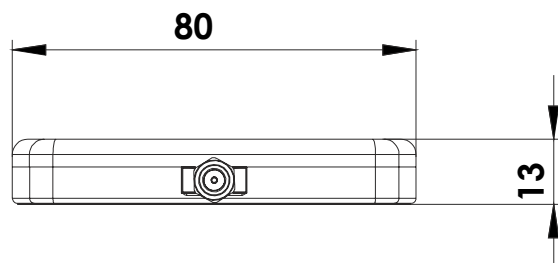

5. Antenna Images

