

2JF0780P

5G NR/UHF Flexible Polymer Adhesive Mount

Key Features

5G NR/UHF

- 410-496 MHz
- 617-960 MHz
- 1427-2690 MHz
- 3300-5000 MHz
- 5150-5925 MHz

Self-Adhesive

Ultra Wideband

High Performance

Flexible Material

Ground Plane Independent

Dimensions 155 × 19.5 × 0.2 mm

Customizable Cable and Connector



1. Antenna and electrical specifications

Parameters	5G NR Antenna				
Technologies	5G, 4G, 3G and 2G				
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/CAT-Mx/CAT-NBx/NB-IoT/3G/2G/UHF				
Frequency (MHz)	410-496	617-960	1427-2690	3300-5000	5150-5925
Band (MHz)	460	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands		n5, n8, 12, n20, n28, n71, n81, n82, n83,	n1, n2, n3, n7, n25, n34, n38, n39, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77, n78, n79	
4G LTE Bands	B31, B72, B73, B87, B88	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, B43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands		B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	410T, 450, 480	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC5, BC11	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-4.8	~-9.4	~-10.5	~-6.2	~-11.7
VSWR	~3.8:1	~2.4:1	~2.2:1	~3.4:1	~1.9:1
Efficiency (%)	~20.6	~44.3	~56.8	~42.1	~45.6
Peak Gain (dBi)	~-3.8	~0.1	~-3.1	~2.1	~4.2
Average Gain (dB)	~-8.0	~-3.6	~-2.5	~-3.8	~-3.5
Impedance (Ohm)			50		
Polarisation			Linear		
Radiation Pattern			Omni-Directional		
Max. Input Power (W)			25		
Connector Type			U.FL Standard (Other Connectors Available)		
Cable Length			180mm Standard (Any Cable Length Available)		
Cable Type			1.37mm Mini-Coax Standard (Other Cables Available)		

Antenna Measurement Conditions:

Mounted on 30 x 30 x 0.25 cm ABS Plate



180 mm of 1.37 mm Mini-Coax Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2JF0780P
Mounting Type	Adhesive Mount
Dimensions (mm)	155 × 19.5 × 0.2
Material	Flexible Polymer
Radome color	White
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

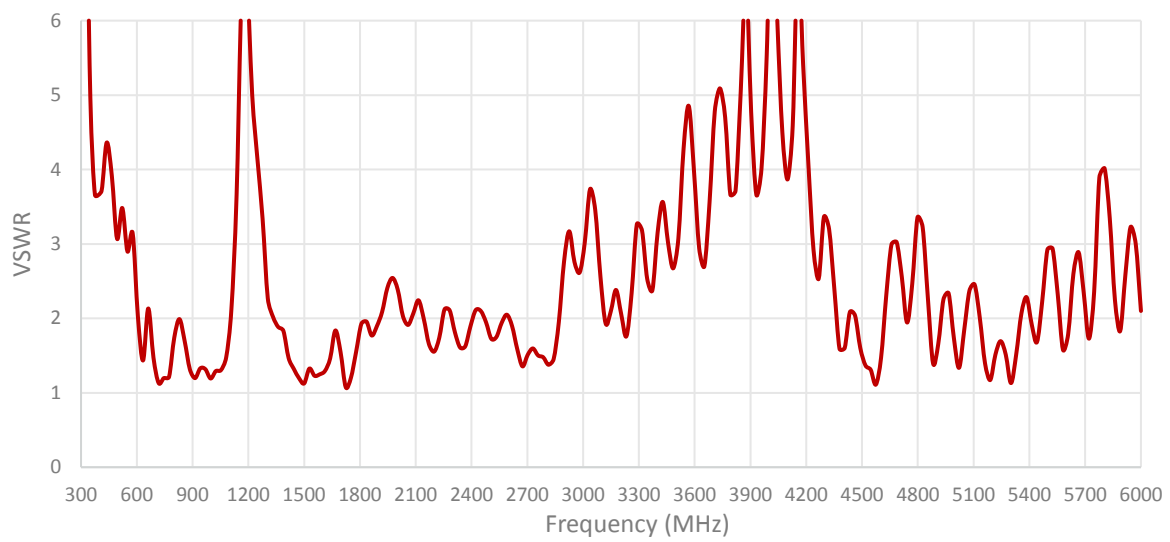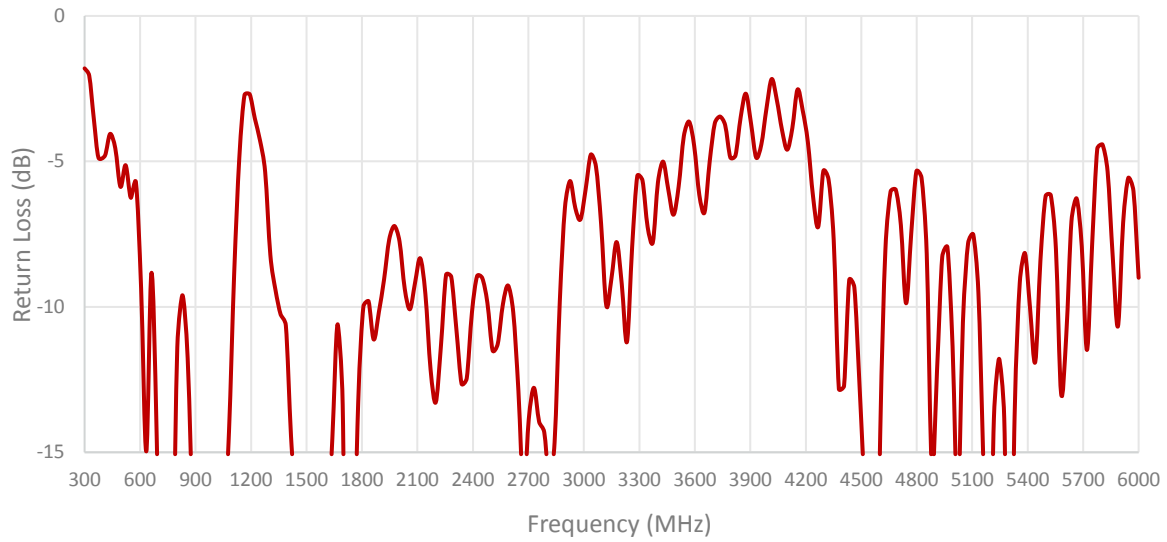

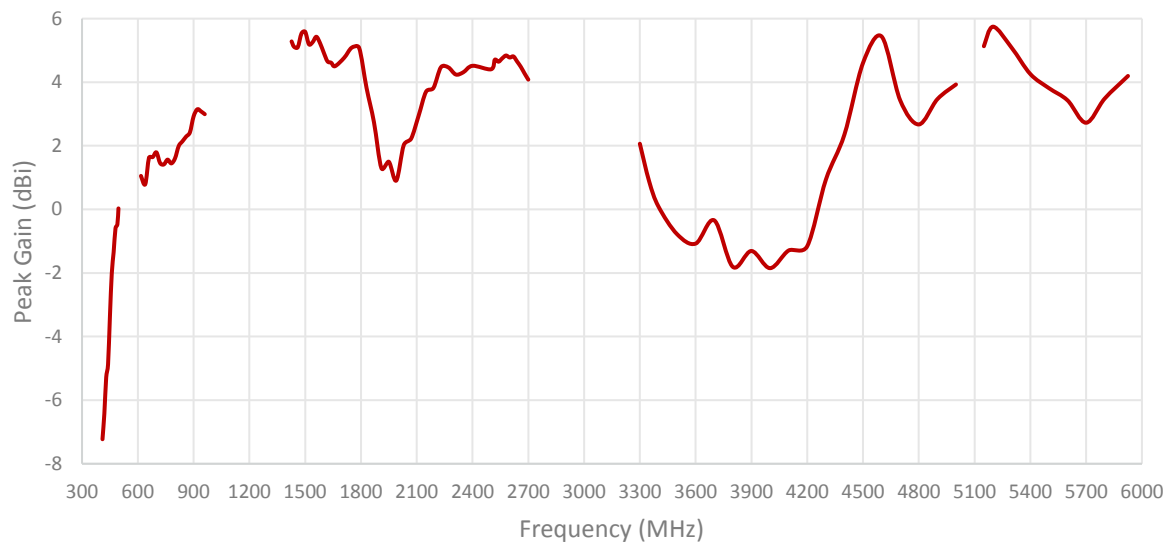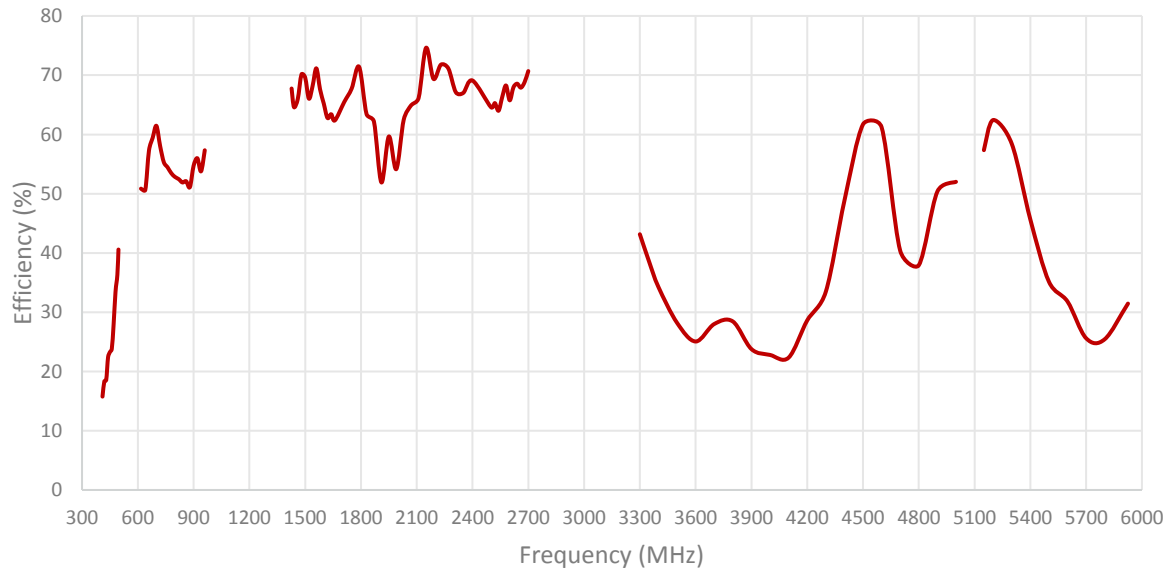


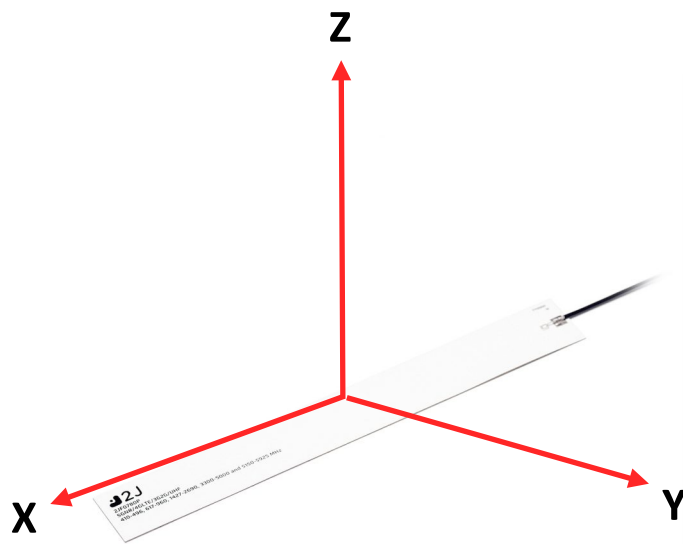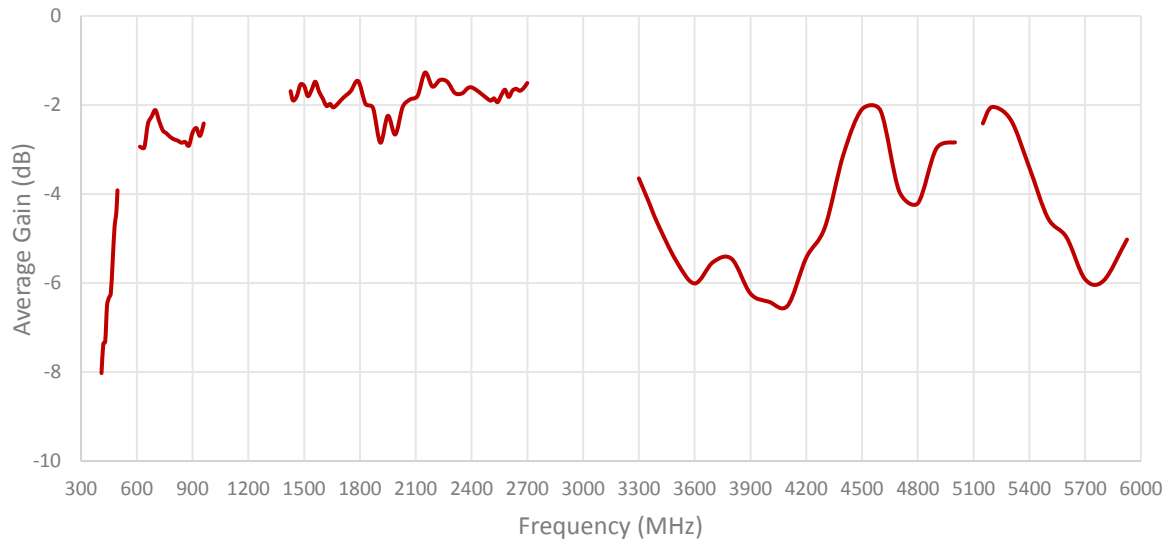


Radiation pattern reference

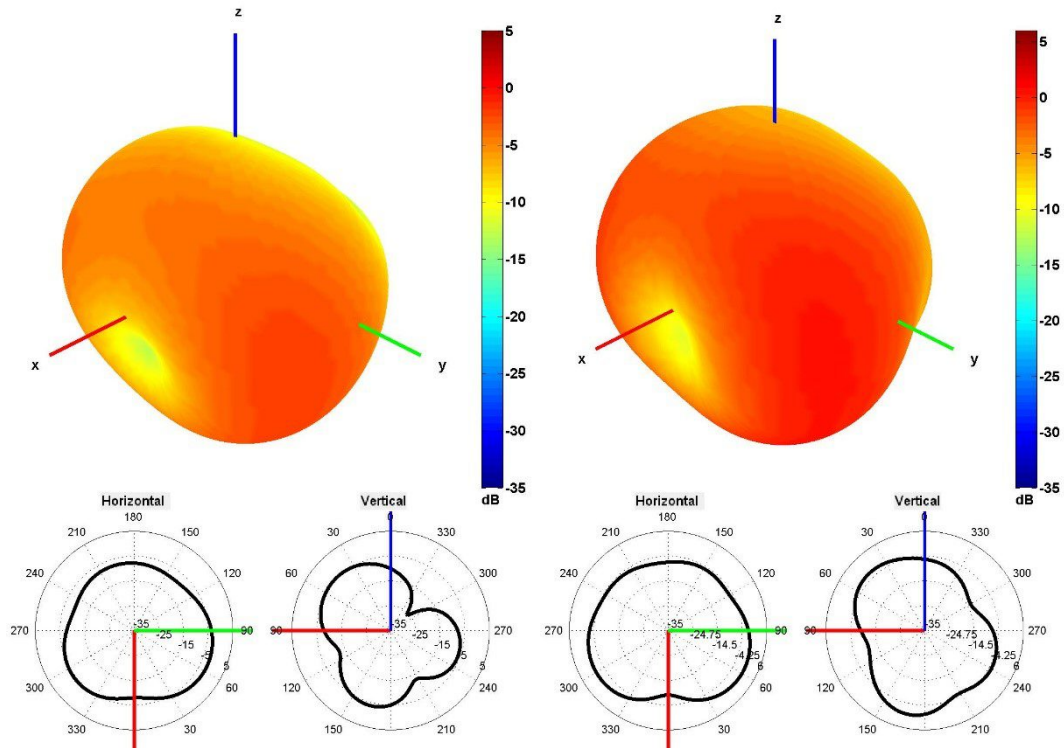


460 and 640 MHz Radiation pattern

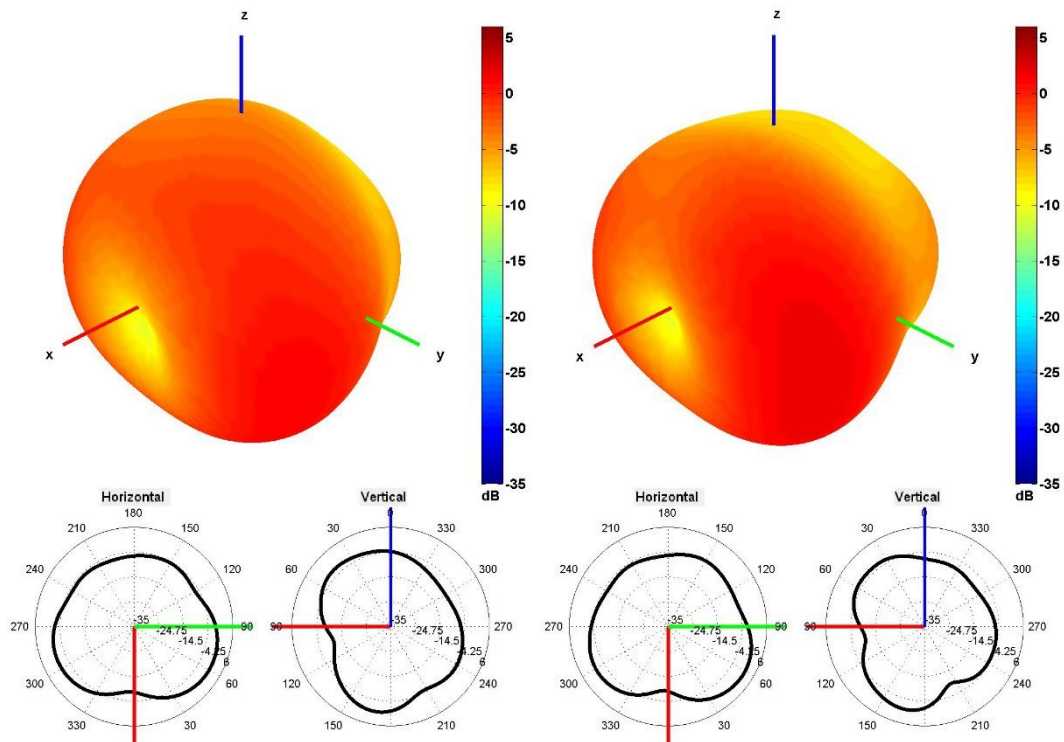


750 and 850 MHz Radiation pattern

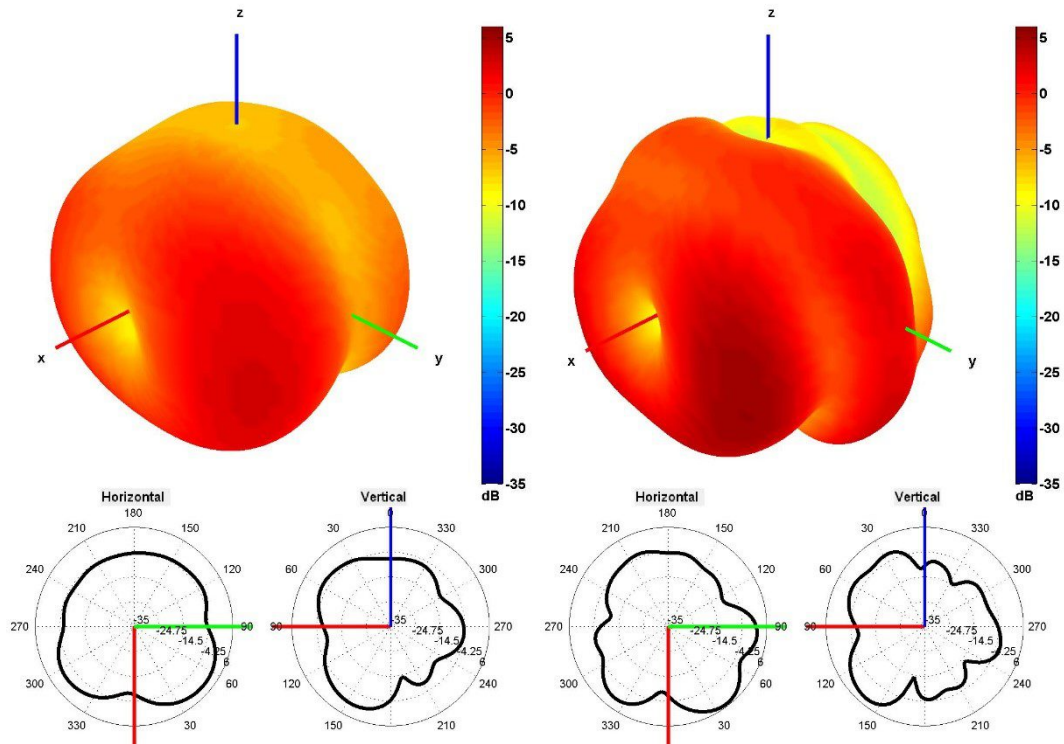


940 and 1500 MHz Radiation pattern

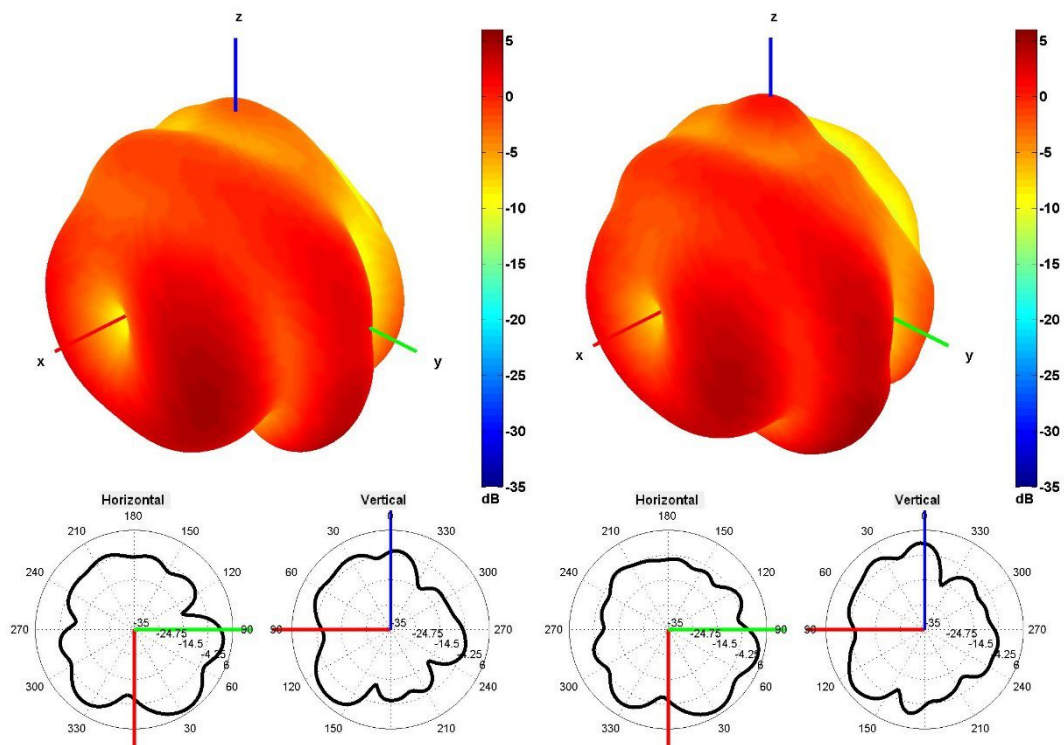


1600 and 1750 MHz Radiation pattern

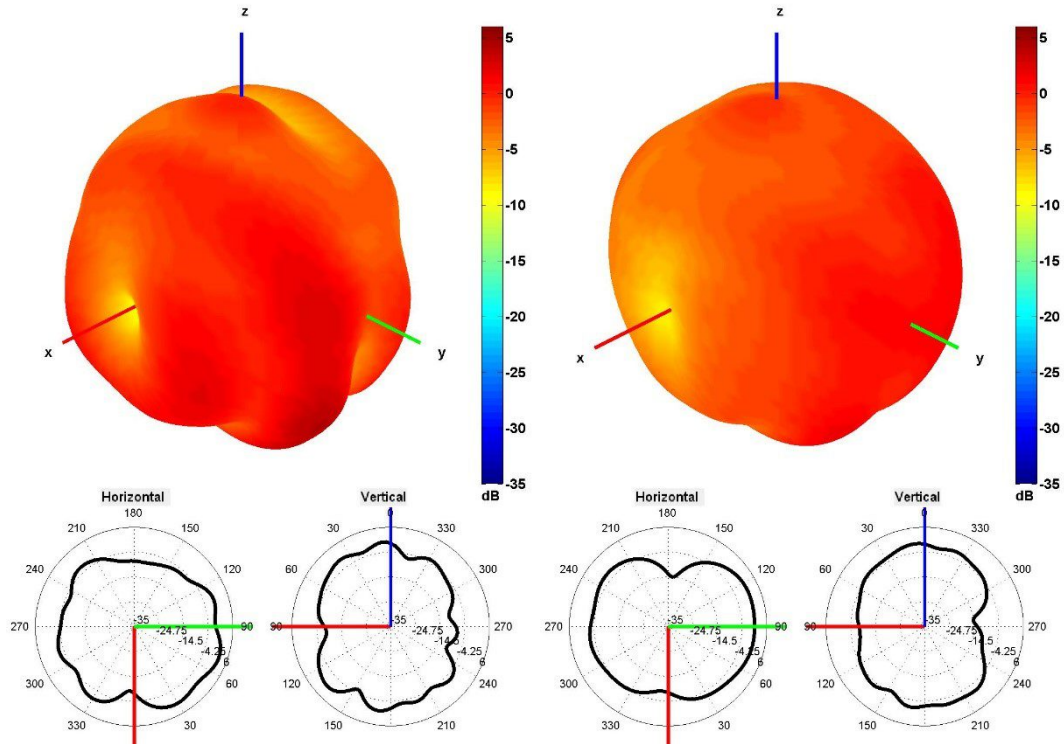


1850 and 1950 MHz Radiation pattern

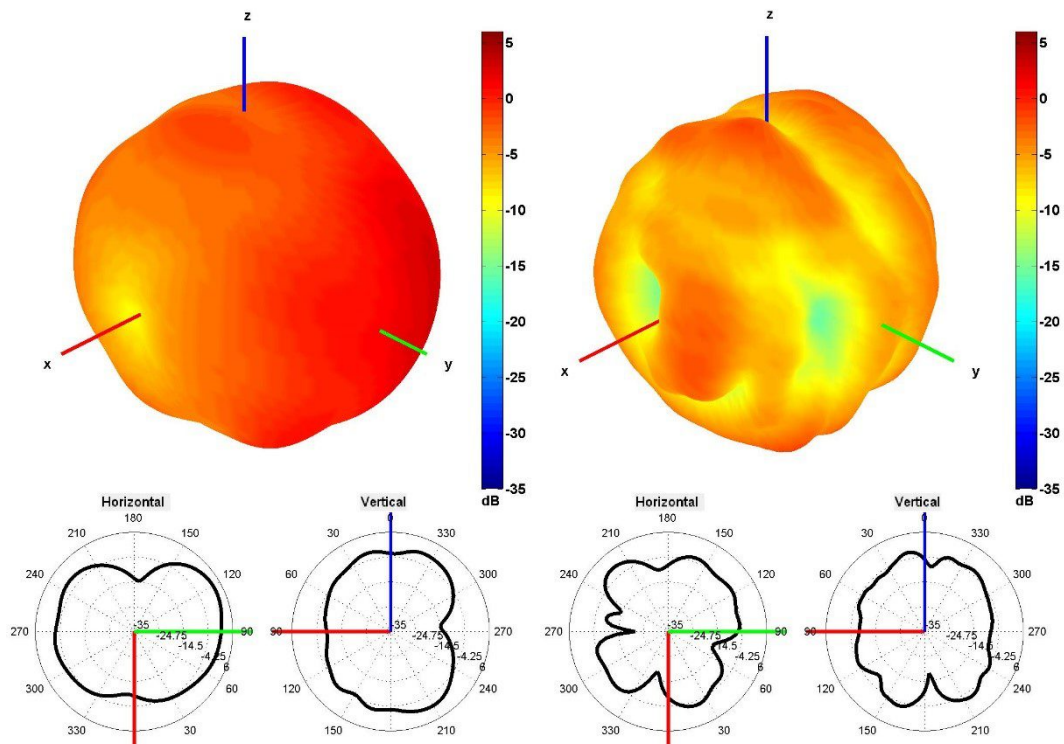


2100 and 2350 MHz Radiation pattern

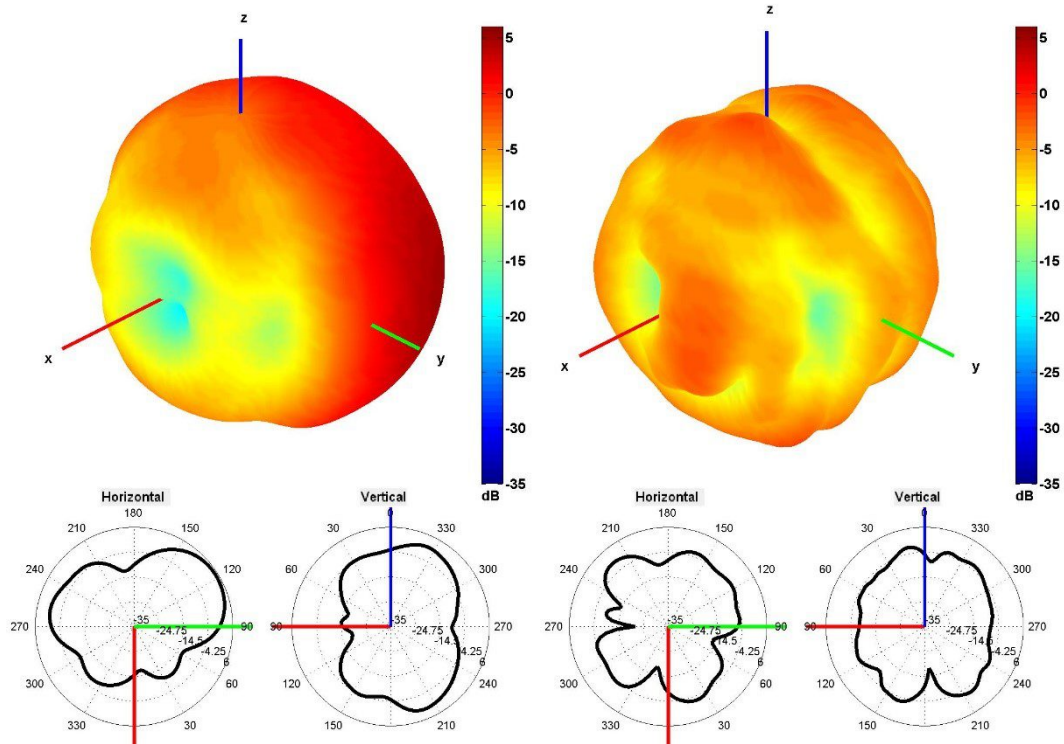

2600 and 3350 MHz Radiation pattern

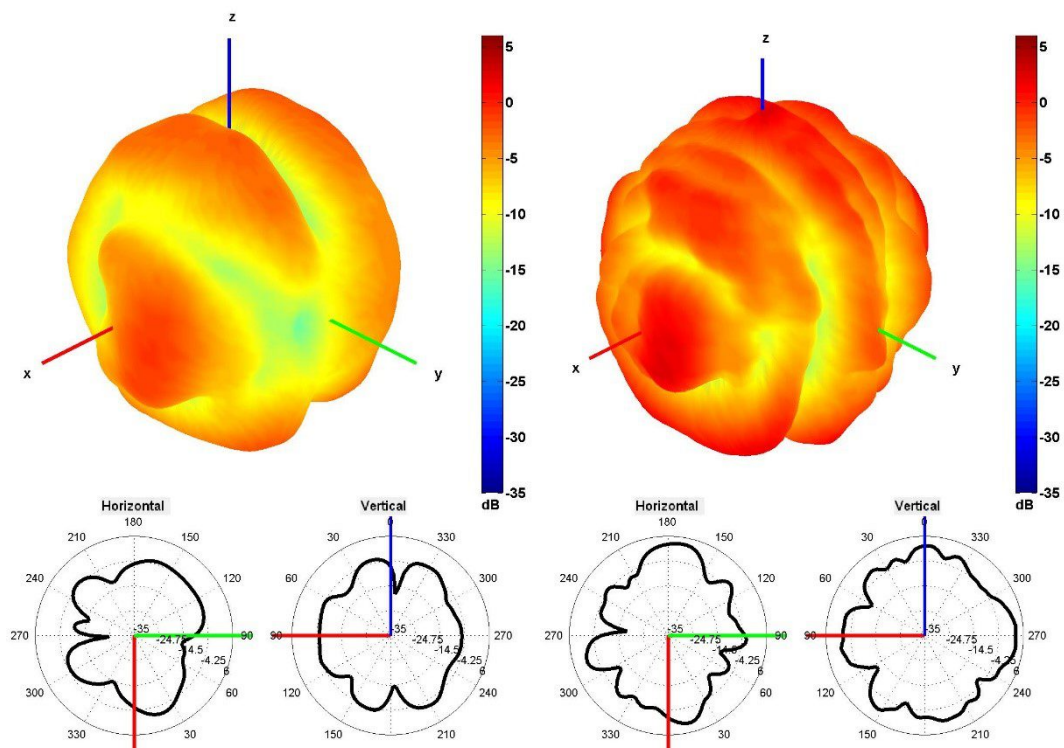


3600 and 4500 MHz Radiation pattern

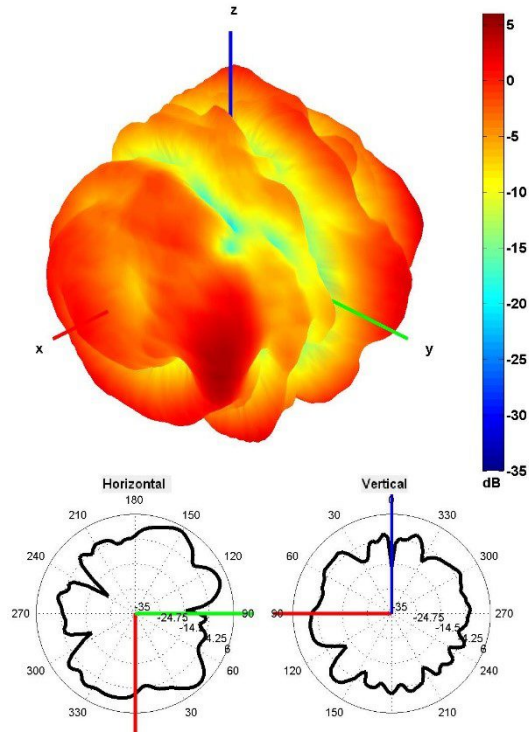

5500 MHz Radiation pattern

4. Antenna drawings

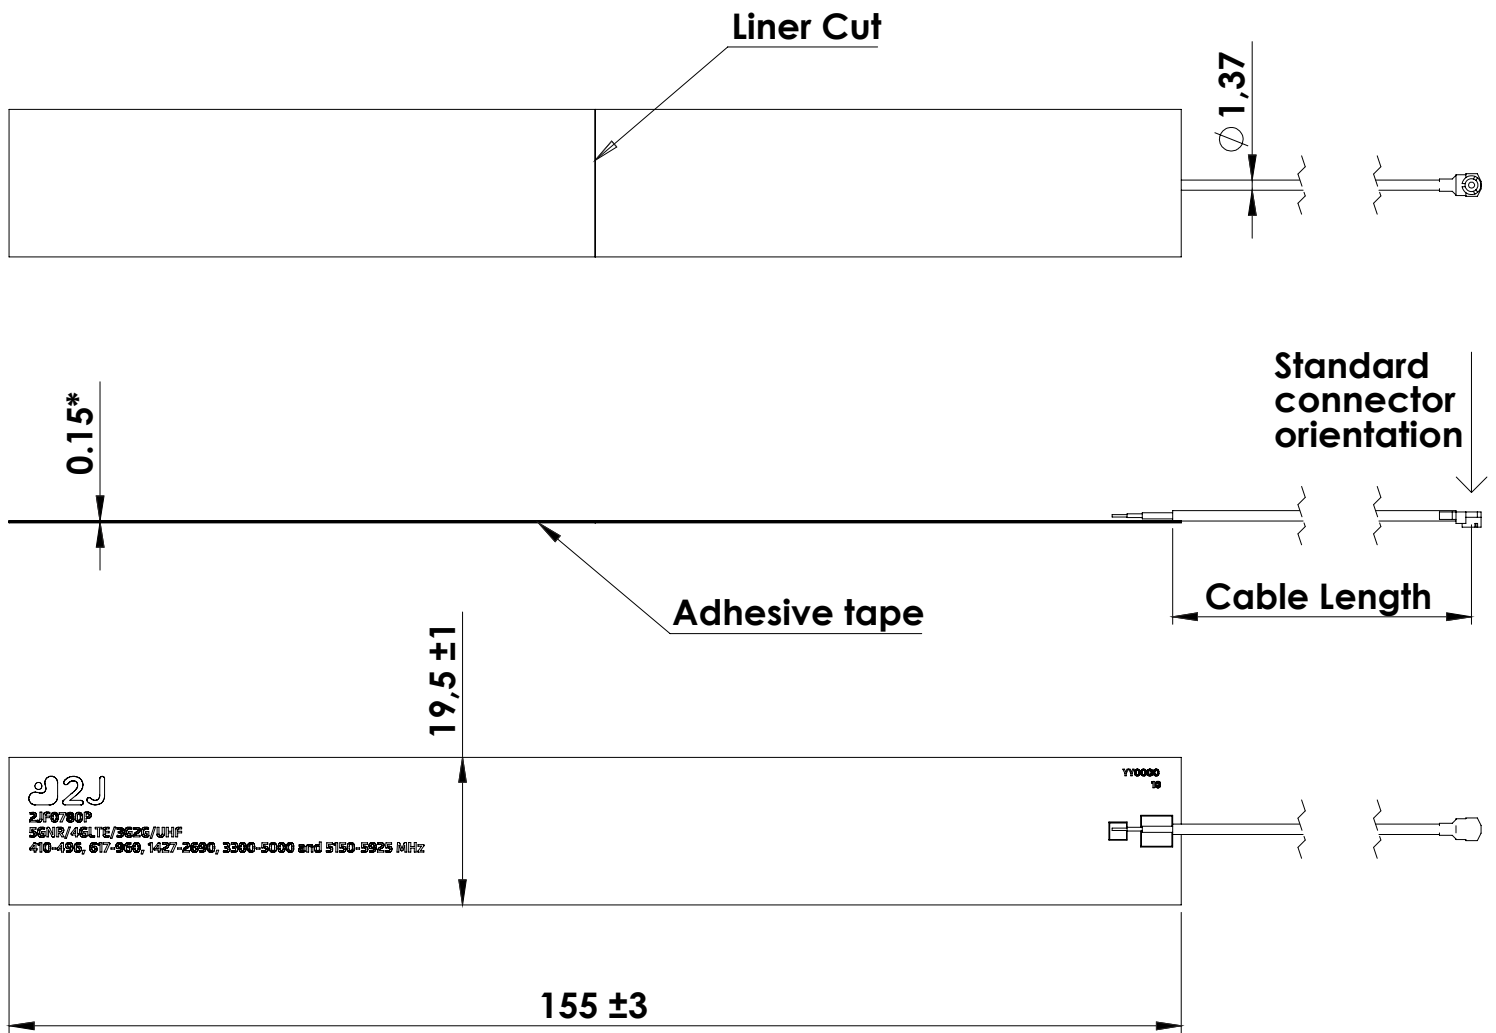

*PCB thickness without Adhesive and Liner

5. Antenna Images

