

2JM0301F

GNSS Ceramic Active Antenna

Key Features

GPS/QZSS/Galileo

- 1575 MHz

Embedded Antenna

14 dB Gain


Pre-Filter

Low Noise Figure

Low Power Consumption

Ground Plane Independent

Dimensions 18 x 18 x 7.3 mm

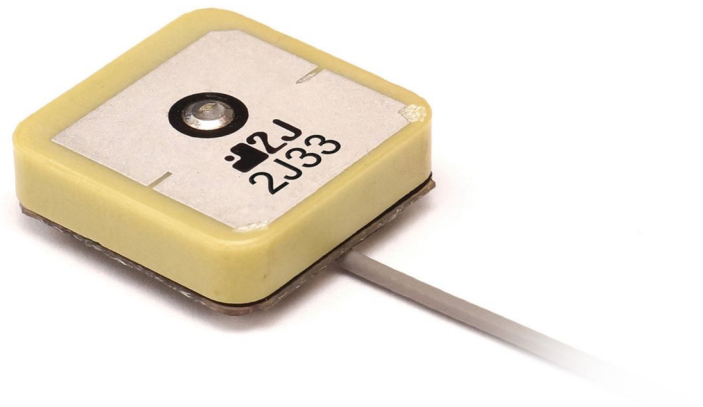


1. Antenna and electrical specifications

Parameters	GNSS Ceramic Active Antenna
Standards	GPS/QZSS/Galileo
Bands (MHz)	1575
Frequency (MHz)	1575.42
Passive Gain (dBi)	~3.6
Impedance (Ohms)	50
Radiation Pattern	Hemispherical
Voltage Range (V)	1.5 - 3.6
Active Gain (dB)	14 @ 2.7 V
Noise Figure (dB)	1.5 @ 2.7 V
Current Consumption (mA)	4 @ 2.7 V
Power Consumption (mW)	10.8 @ 2.7 V
Saw Filter Type	Pre-Filter
Out of Band Rejection (dB)	43
ESD Protection (kV)	6
Connector Type	U.FL Standard (Other Connectors Available)
Cable Length	100 mm Standard (Any Cable Length Available)
Cable Type	1.37 mm Mini-Coax Standard (Other Cables Available)


2. Mechanical and environmental specifications

Specifications	2JM0301F
Dimensions (mm)	18 × 18 × 7.3
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

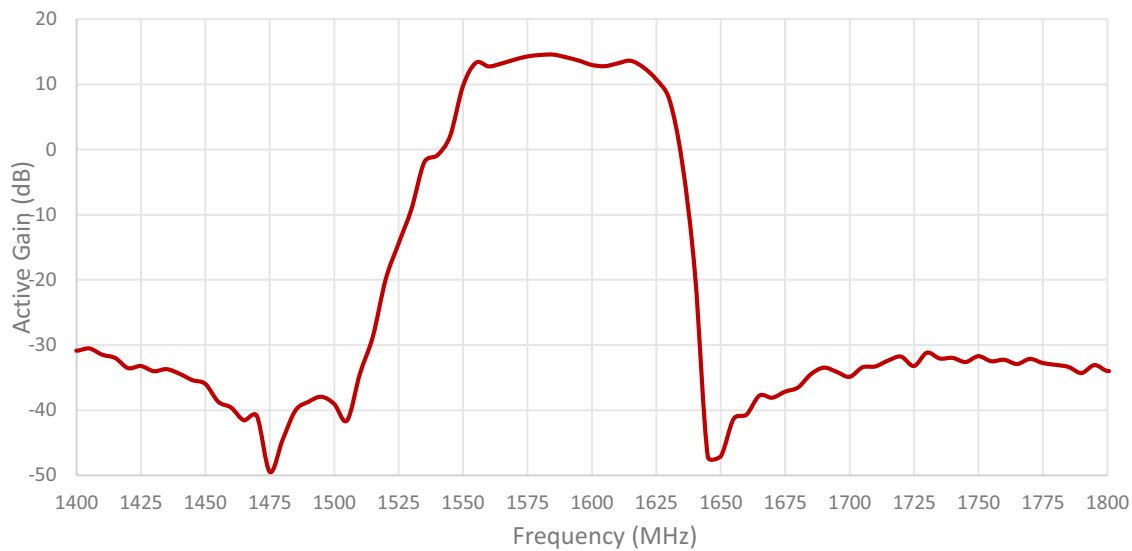

* Measured at 2.7 V


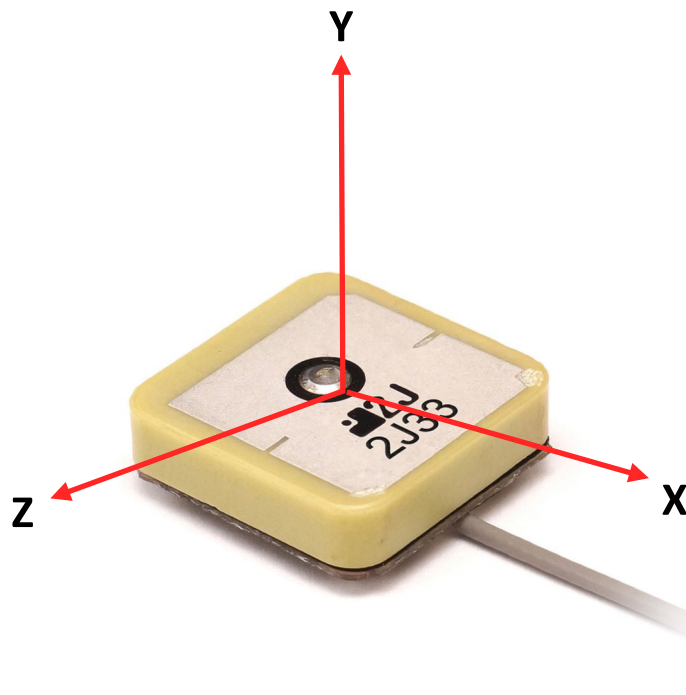


Radiation pattern reference

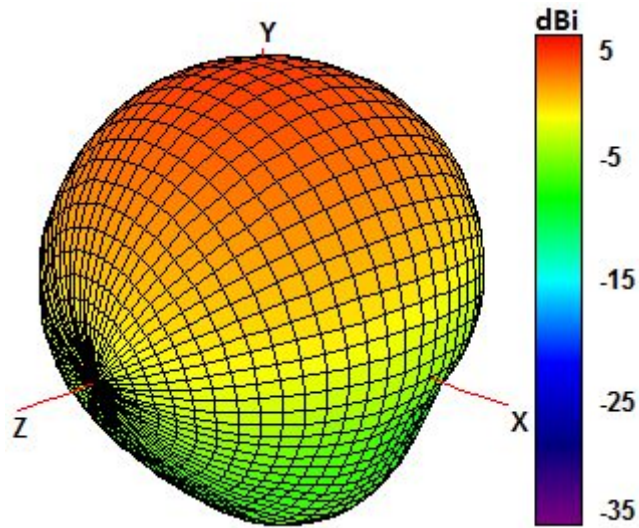

1575 MHz Radiation pattern

4. Antenna drawings

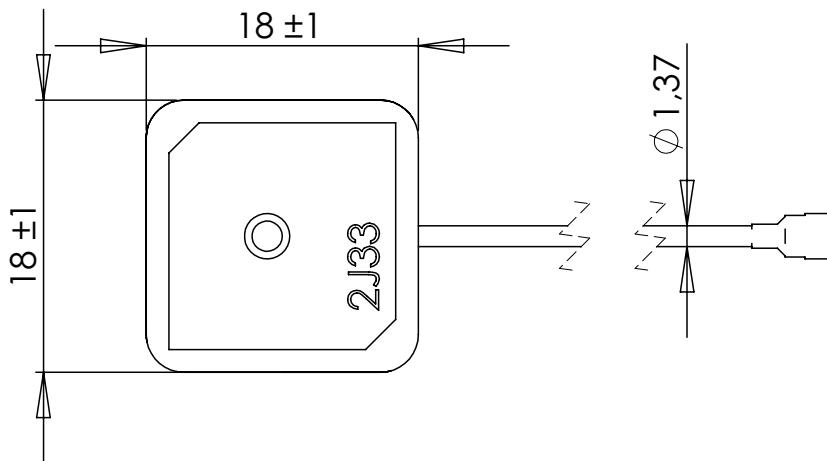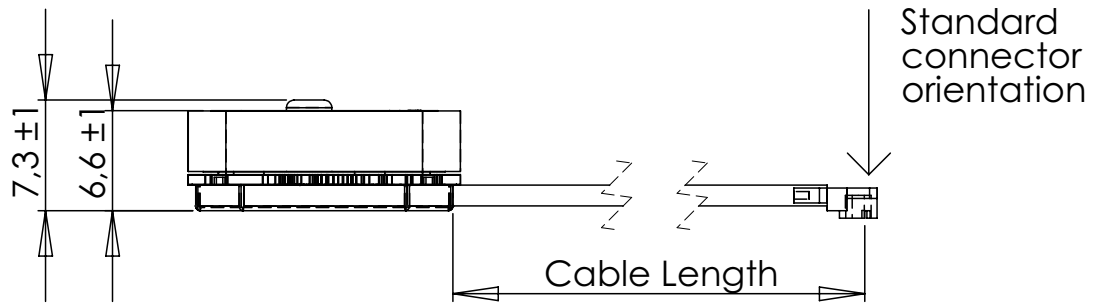

5. Antenna Images

