

2J6924Pa

CELLULAR/LTE MIMO Adhesive Mount

Key Features

Cable 1 - 2: CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 MHz

Adhesive Mount

Low Profile

High Gain

Ground Plane Independent

Customizable Cable and Connector

Dimensions 89 × 76 × 30 mm

Certificates: IP67, IP69



1. Antenna and electrical specifications

Cable 1

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-7.6	~-11.9	~-19.9
VSWR	~2.5:1	~1.8:1	~1.3:1
Efficiency (%)	~50.6	~54.0	~62.1
Peak Gain (dBi)	~-4.6	~-5.6	~-5.9
Average Gain (dB)	~-3.2	~-2.7	~-2.1
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	D302 Standard (Other Cables Available)		

Cable 2

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-8.6	~-10.7	~-22.5
VSWR	~2.3:1	~1.9:1	~1.2:1
Efficiency (%)	~50.6	~50.7	~61.2
Peak Gain (dBi)	~-3.8	~-5.9	~-6.1
Average Gain (dB)	~-3.7	~-3.0	~-2.1
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	D302 Standard (Other Cables Available)		

Antenna Measurement Conditions:



Mounted on Metal Plate of 30 x 30 cm
 200 cm of Cable D302
 Measured in Certified CTIA 3D Anechoic Chamber

2. Mechanical and environmental specifications

Specifications	2J6924Pa
Mounting Type	Adhesive Mount
Dimensions (mm)	89 × 76 × 30
Radome Type	ABS UV Stable
Radome Color	Black, White
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69,

3. Antenna parameters

Cable 1: CELLULAR/LTE

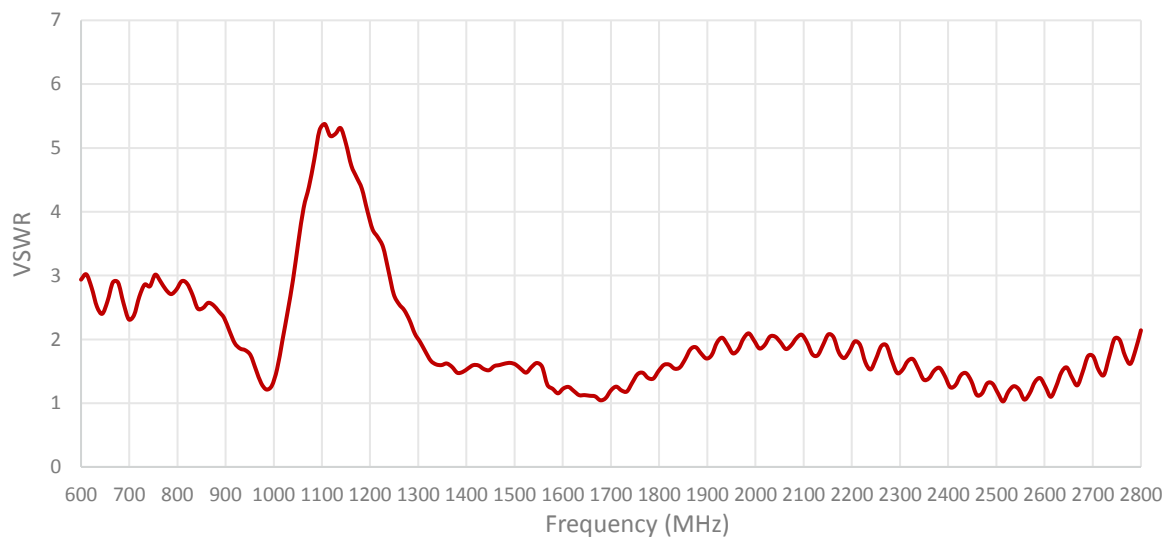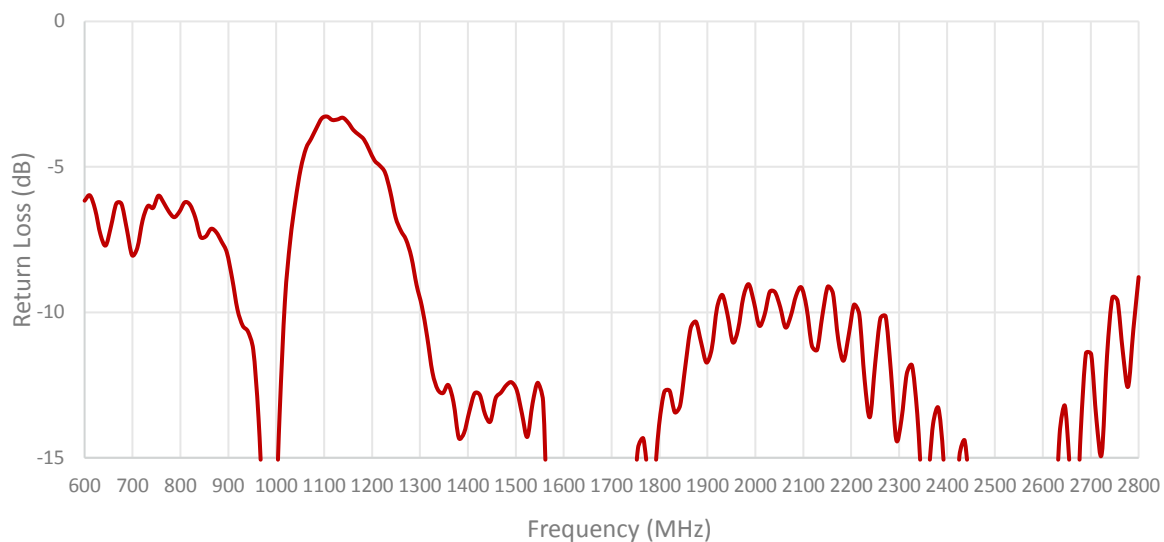









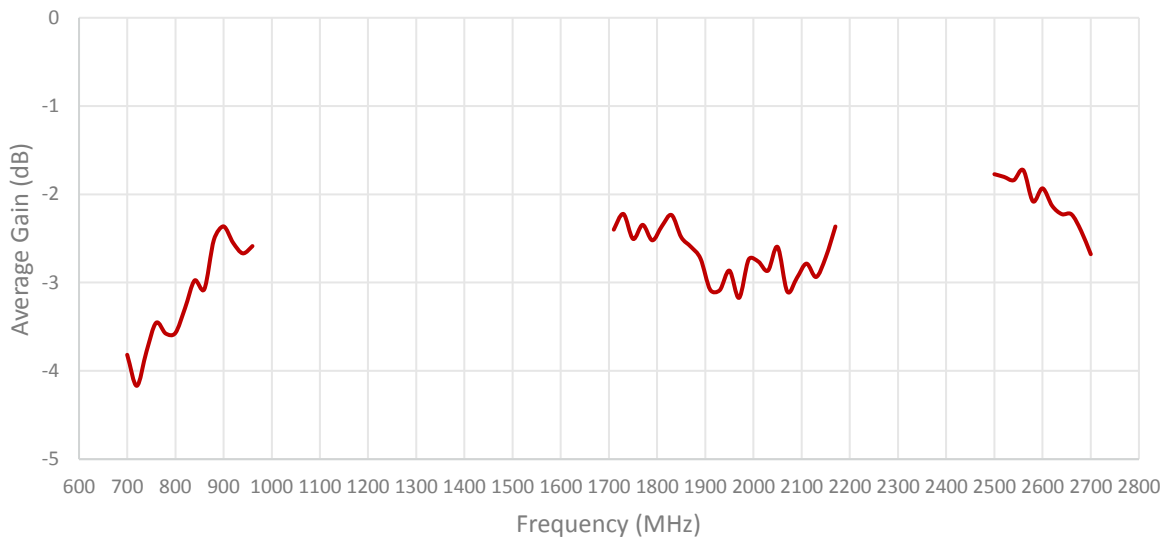


Table 2: CELLULAR/LTE

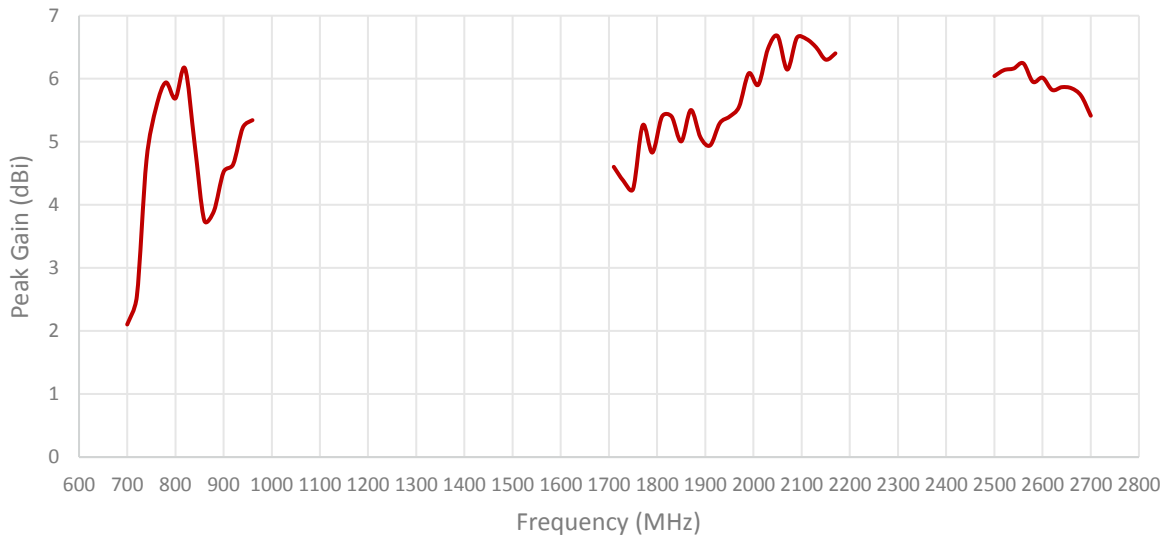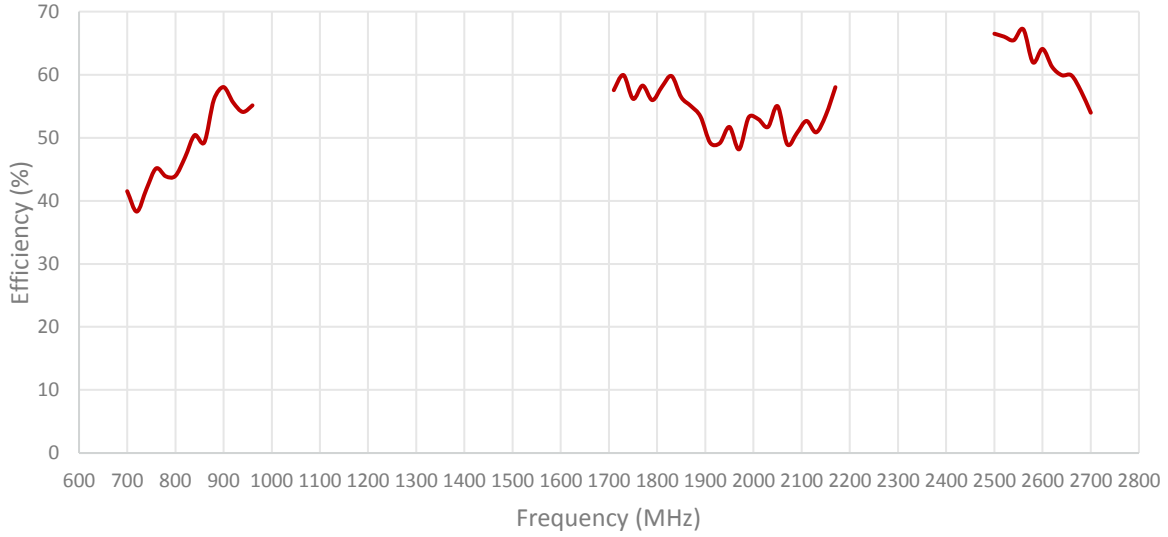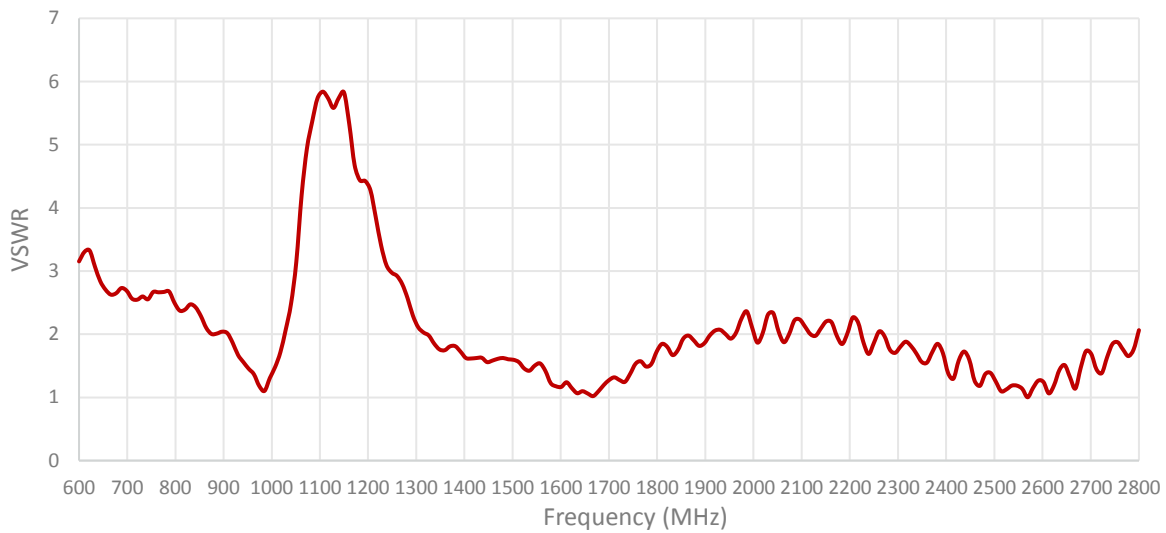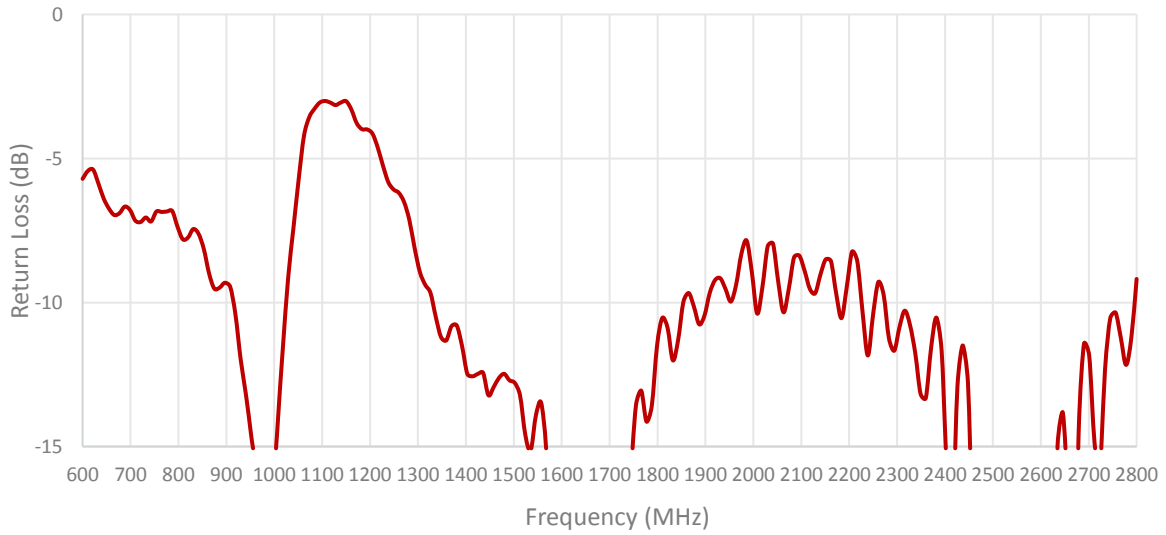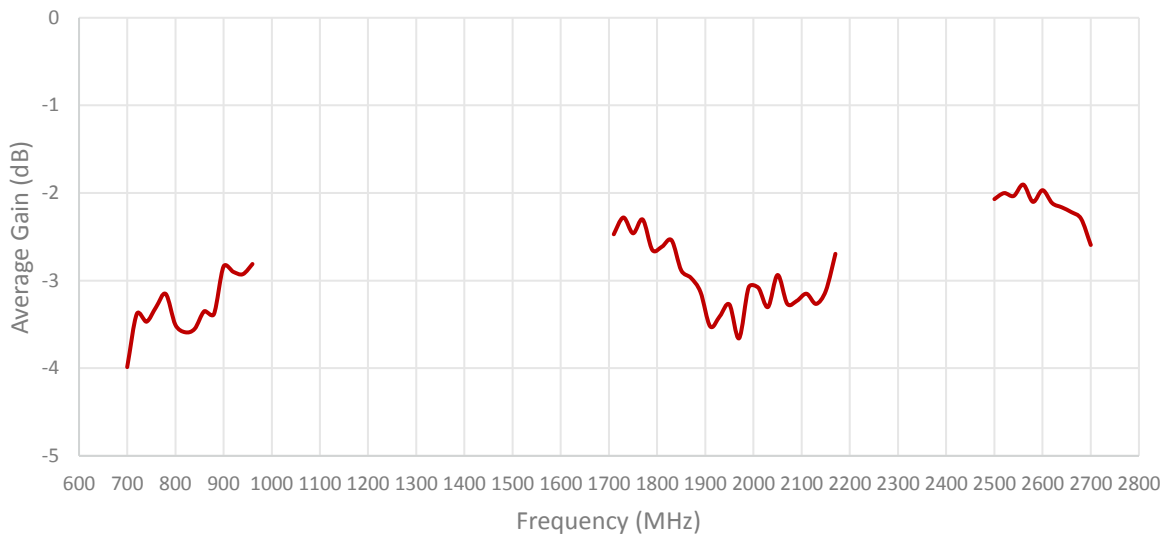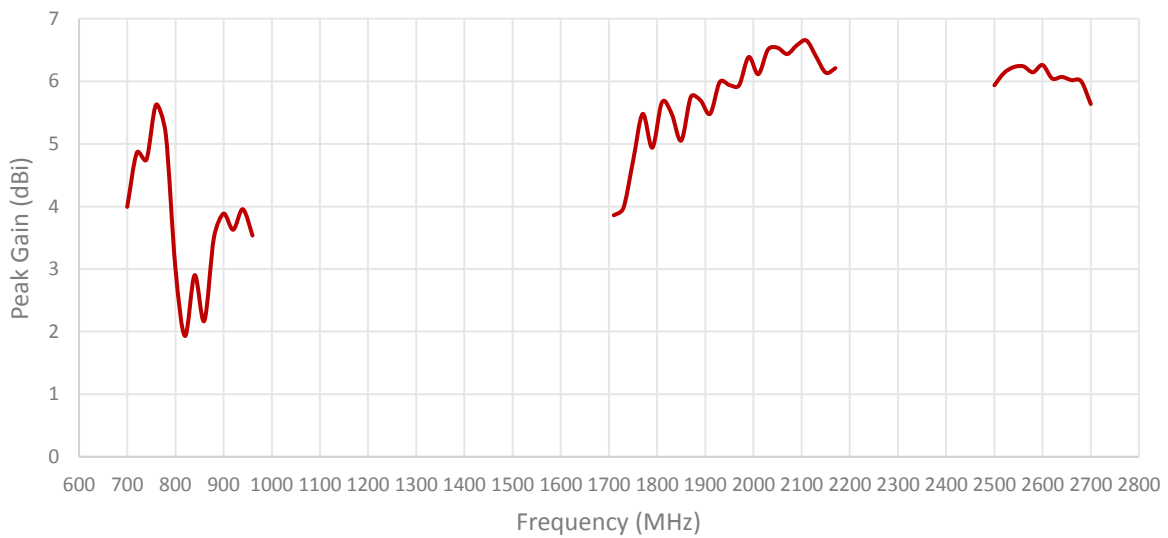


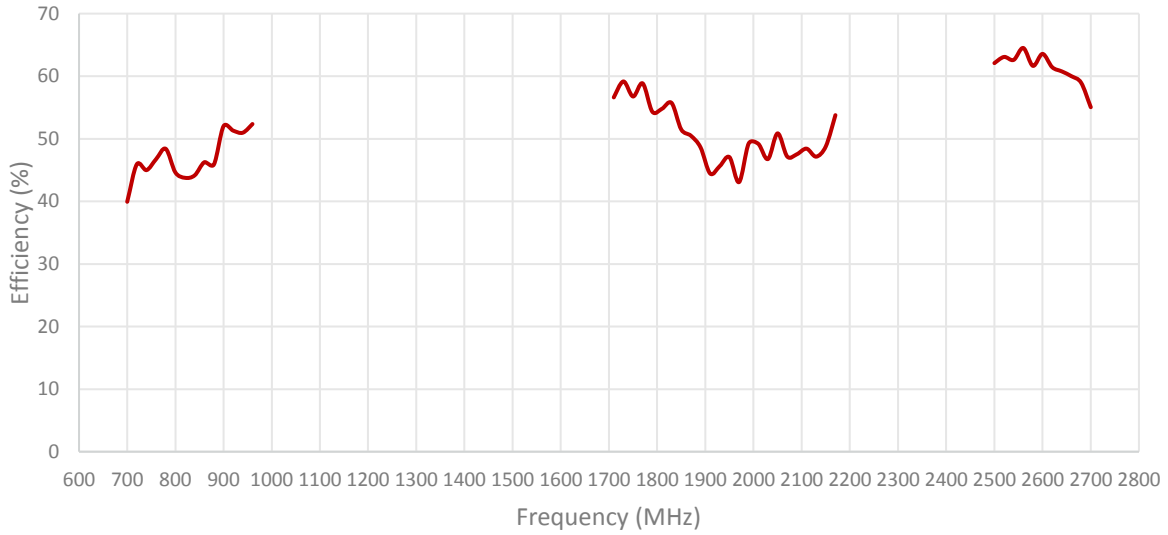


ISOLATION FOR CABLES 1 AND 2

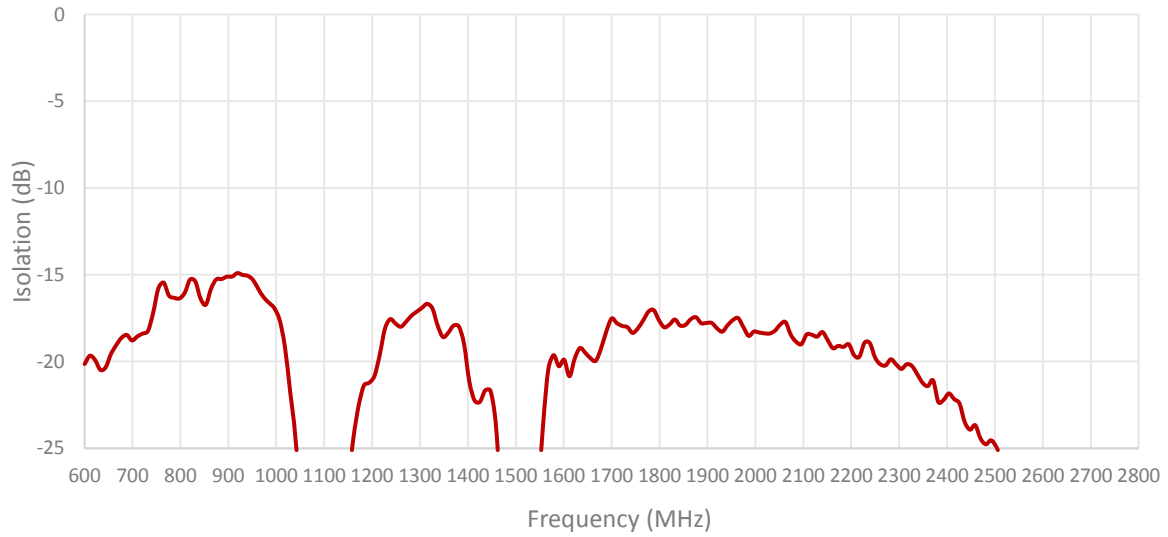


ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 2

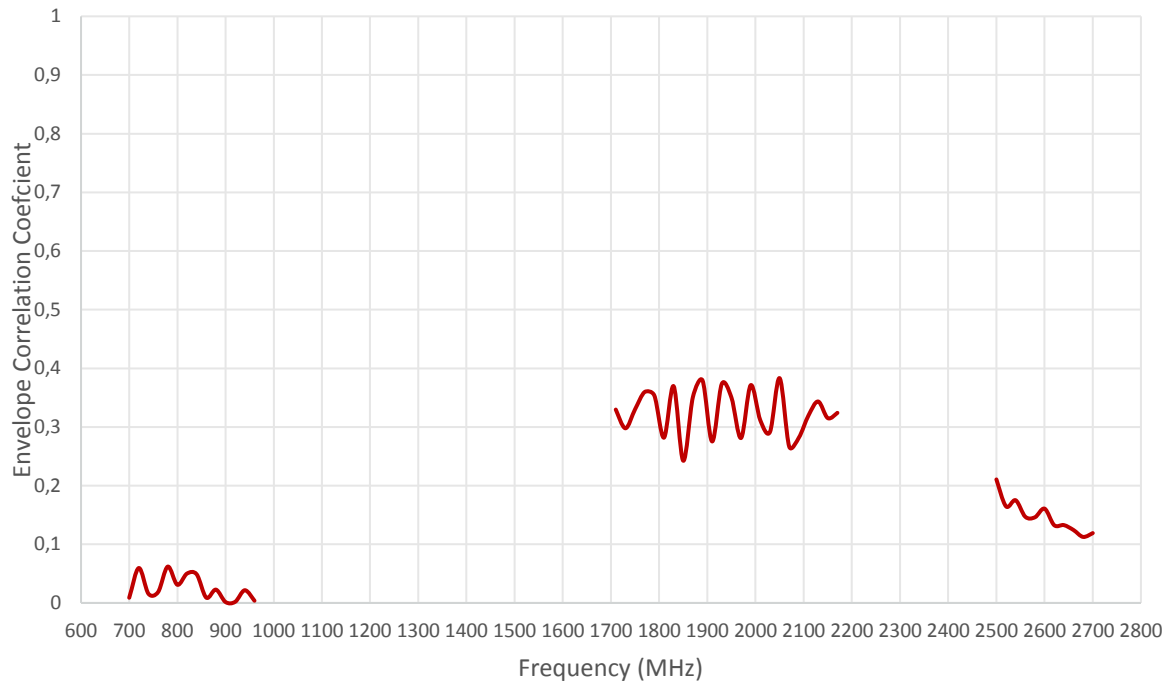

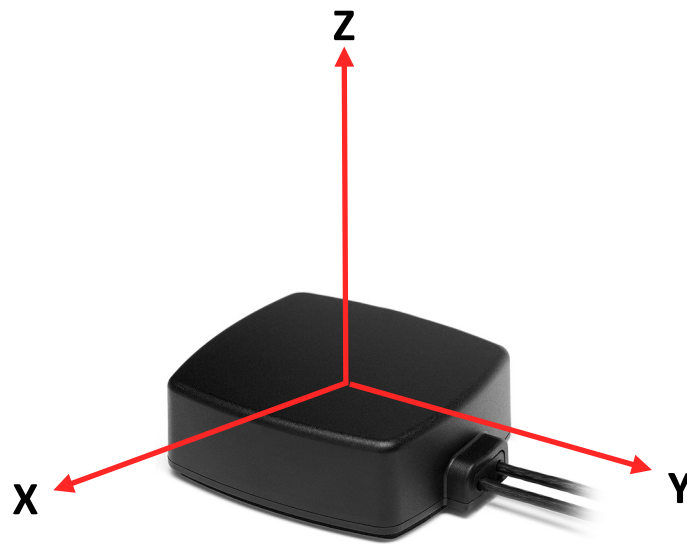


Radiation pattern reference


Table 1: CELLULAR/LTE

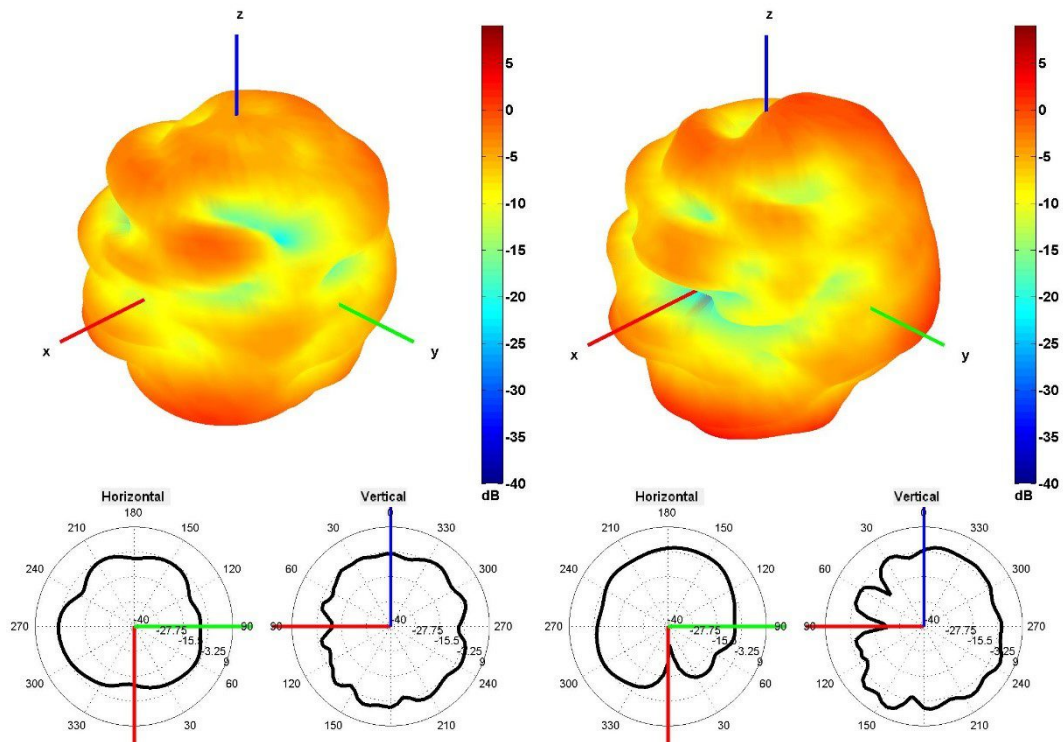


750 and 850 MHz Radiation pattern

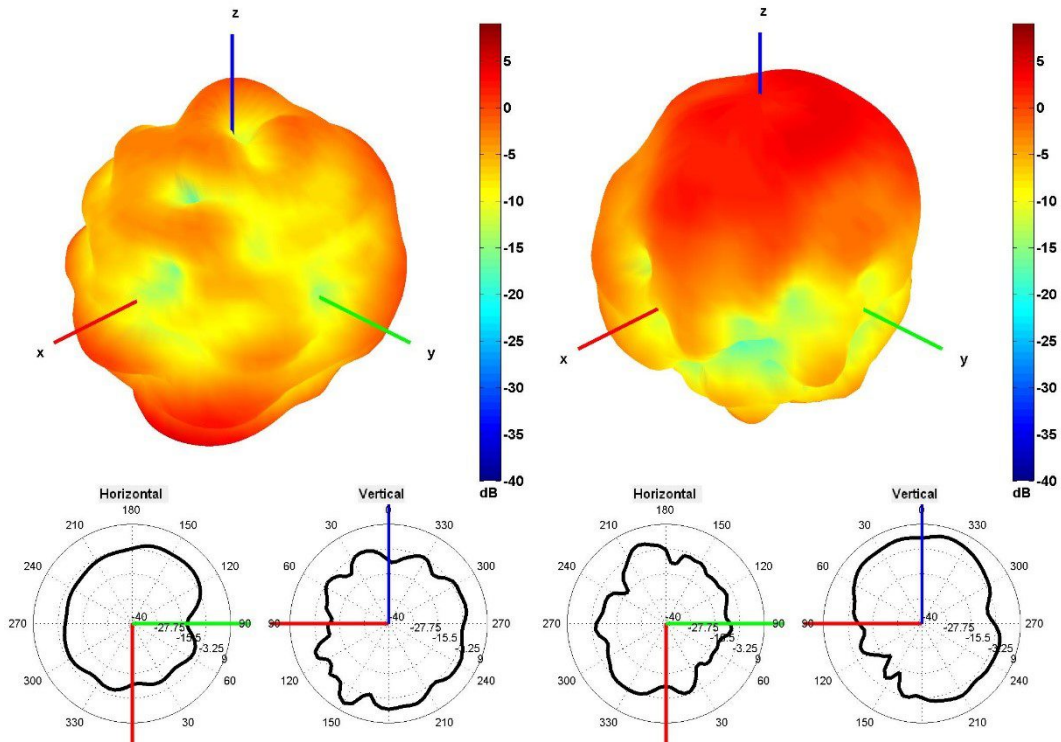

940 and 1750 MHz Radiation pattern

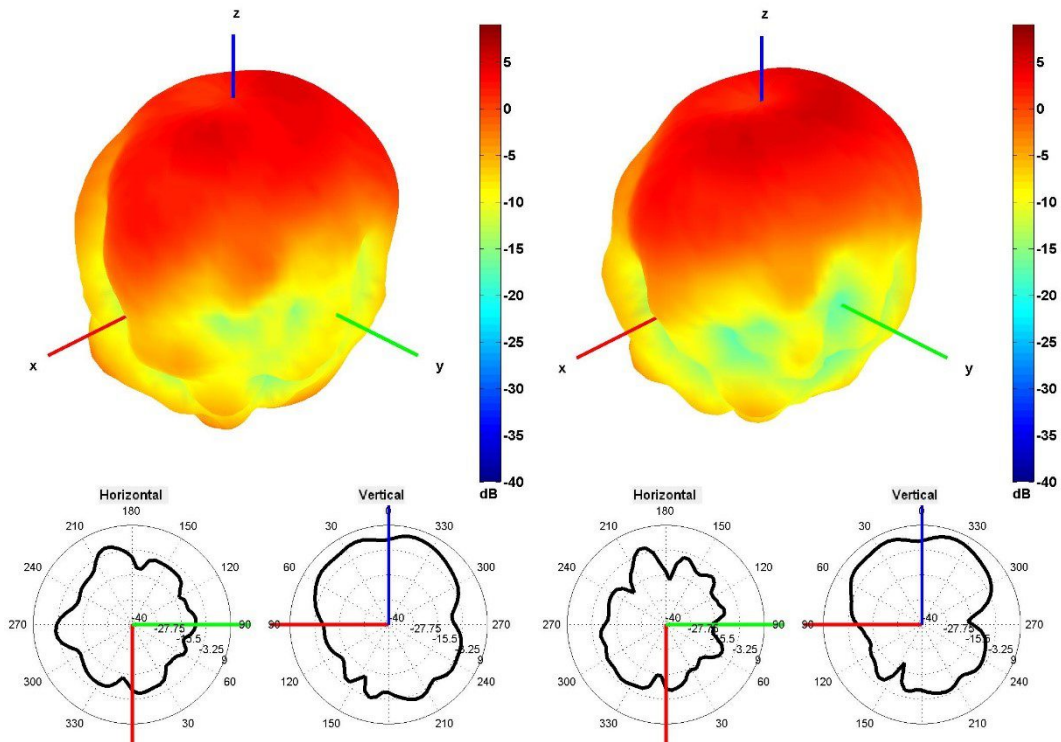


1850 and 1950 MHz Radiation pattern

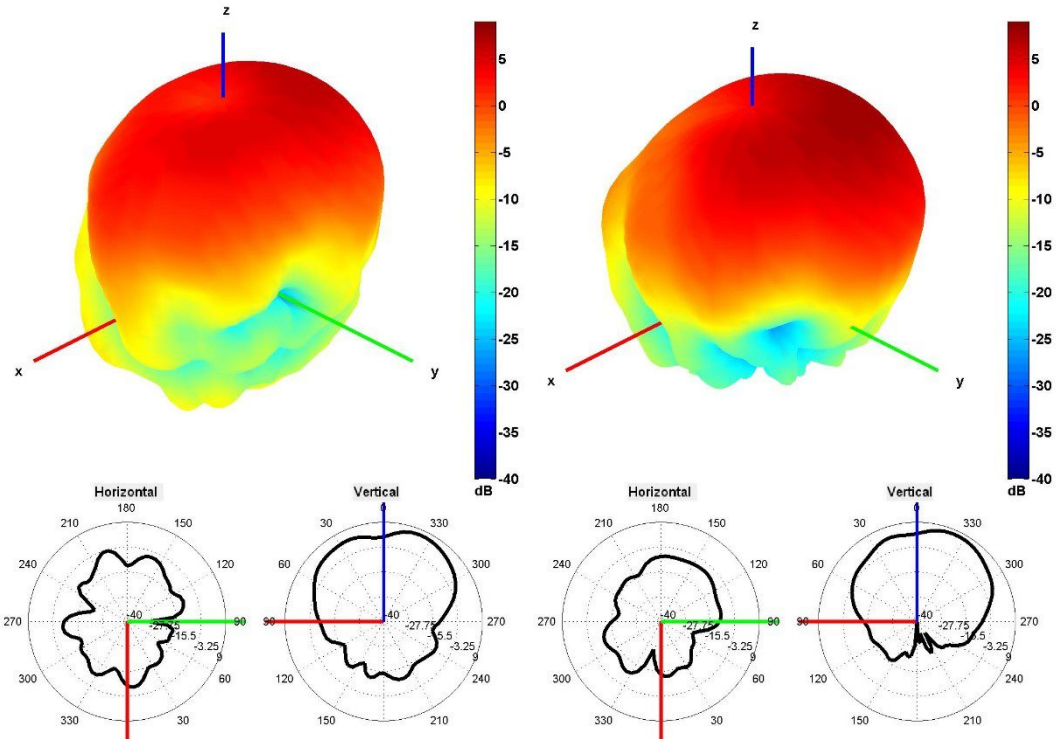


2100 and 2600 MHz Radiation pattern


Table 2: CELLULAR/LTE

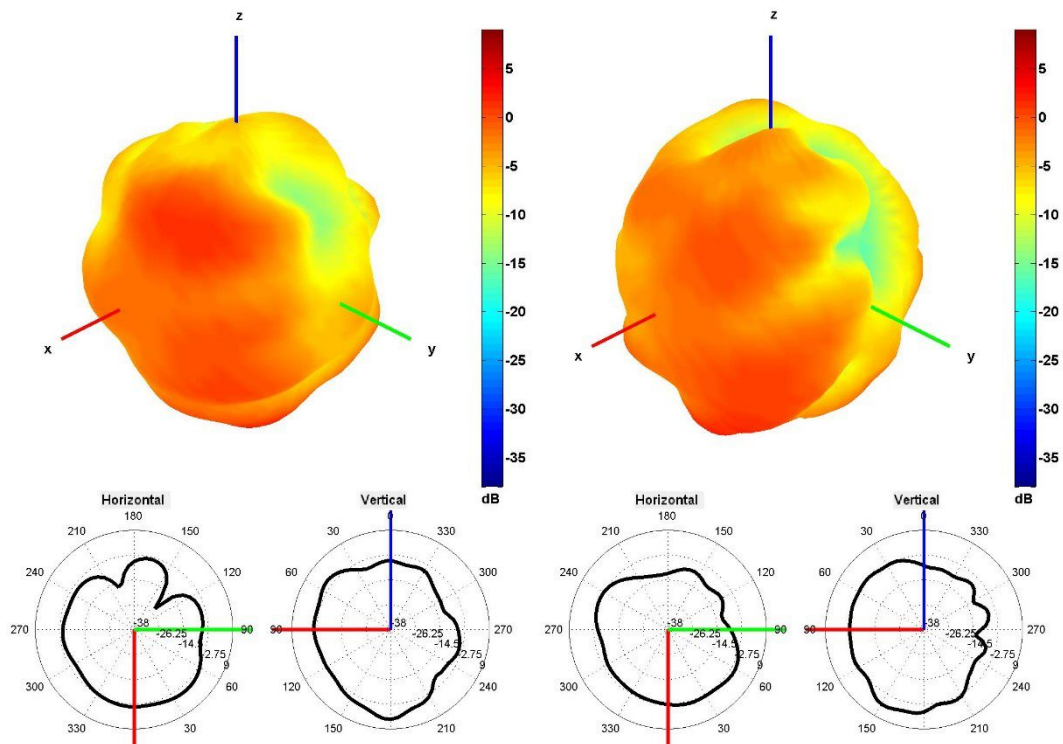


750 and 850 MHz Radiation pattern

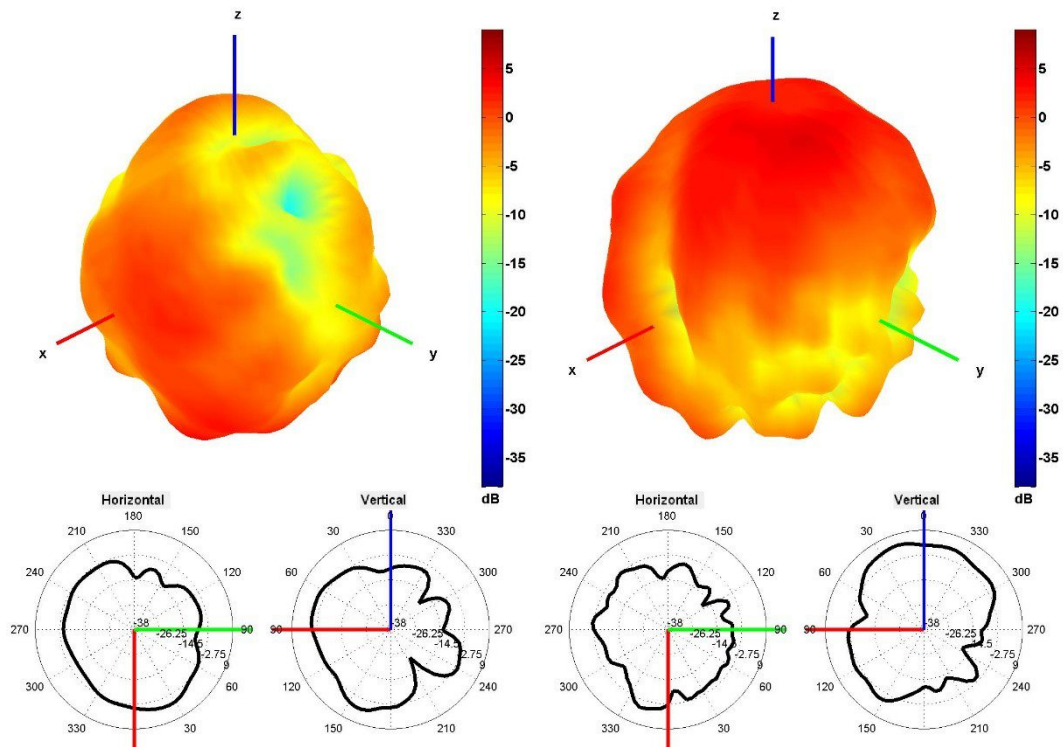

940 and 1750 MHz Radiation pattern

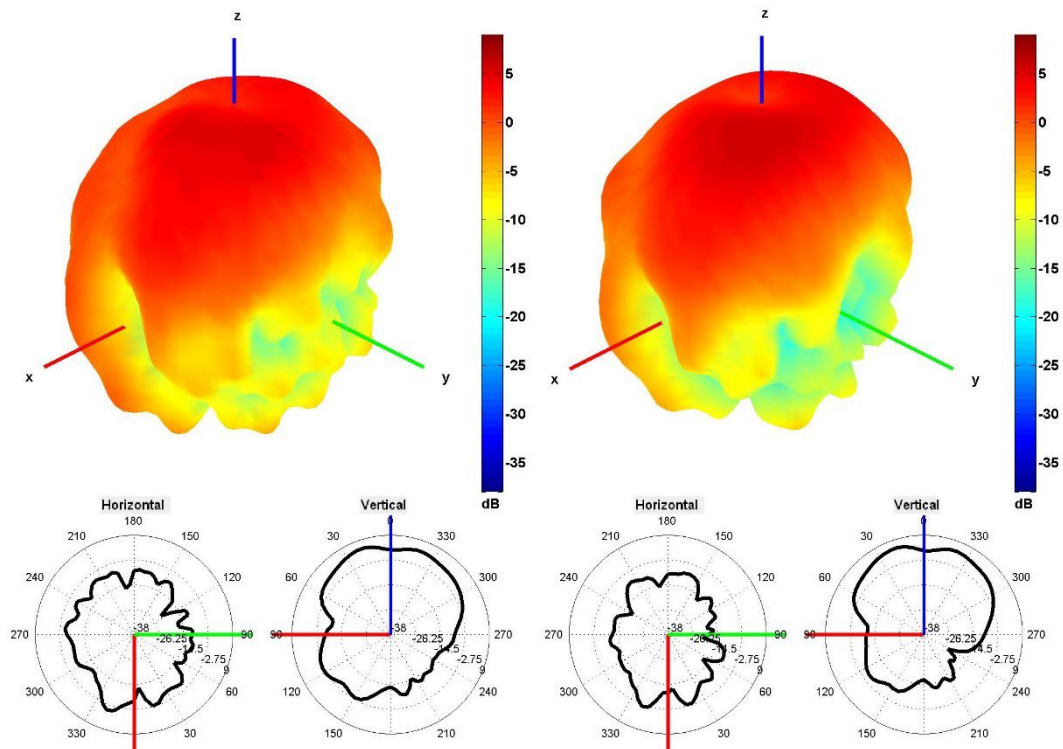


1850 and 1950 MHz Radiation pattern

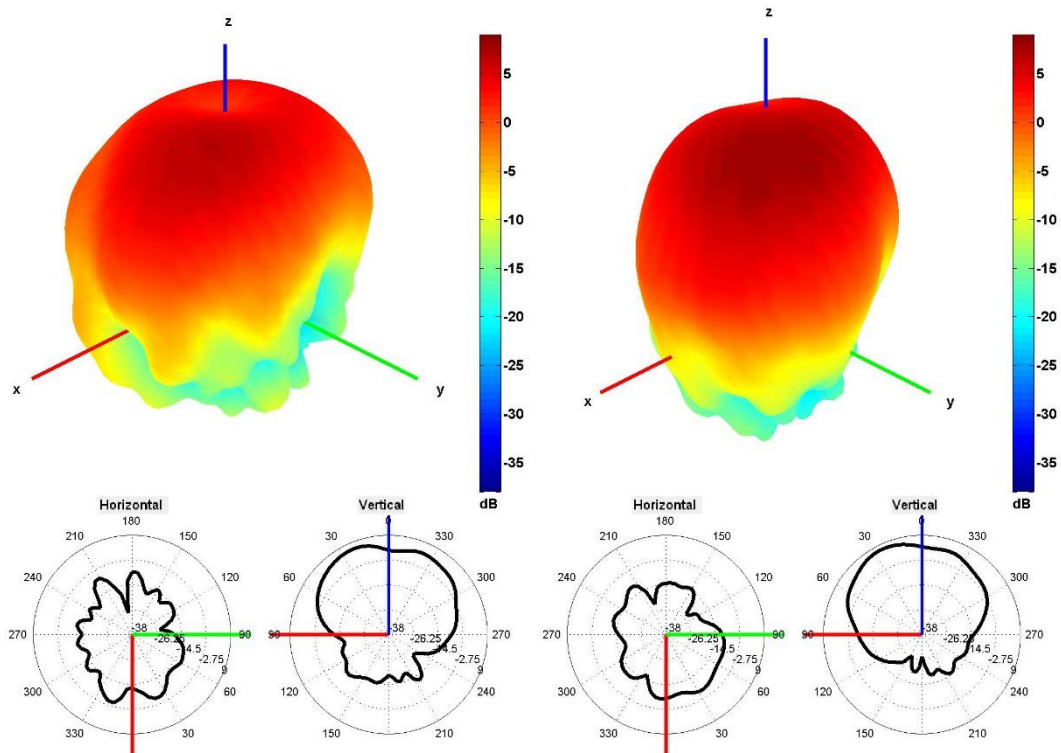

2100 and 2600 MHz Radiation pattern

4. Antenna drawings

Adhesive Mount option

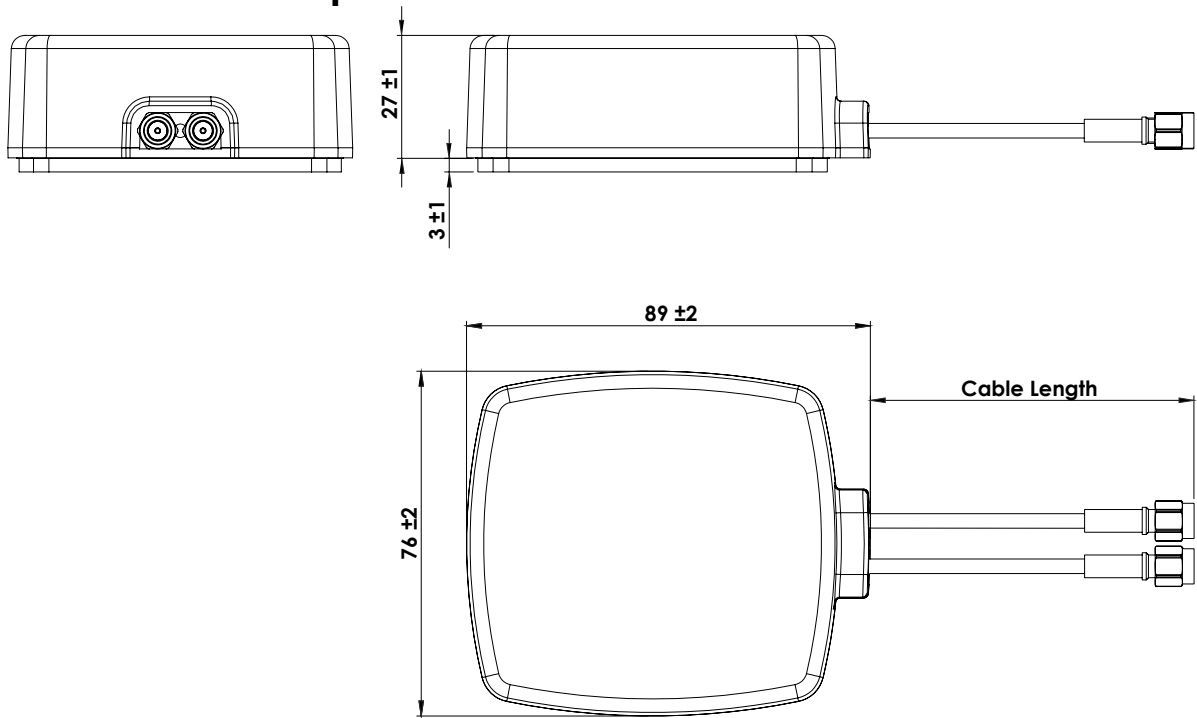

5. Antenna Images

